
K-MV G 230 V, 50 - 60 HZ IV

Normally closed, 230 V / 50 to 60 Hz, internal pilot control

Özellikler

Elektrik bağlantısı	ISO 4400 (Pg 11P connector socket)
Koruma sınıfı	IP65 (with connector socket fitted)
Akışkan sıcaklığı	max. +90 °C
Çalışma basıncı	min. 0,35 bar; max. 8,5 bar
Yapı şekil 2 havalandırma bağlantısı	G 3/8 (K-07302231 und K-07302304), G 3/4 (K-07302232 und K-07302305, \ nK-07302233 und K-07302306), Silencers can be retrofitte
Gövde	Aluminium
İç parçalar	Stainless steel
Membran	Type 1 TPE (Hydrel); Type 2 CR (chlorophene/neoprene)
Conta	Perbunan (NBR)



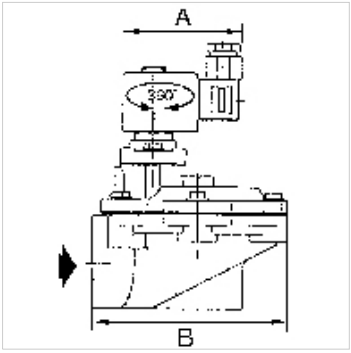

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

Environmental protection today demands state-of-the-art cleaning processes. Dust filter systems are an indispensable aid to pollution control. The fabric filters installed in these systems are cleaned by blowing in compressed air pulses in quick succession counter to the main direction of flow. The solenoid valves used for this purpose are characterised by the following application-specific design features:

- Angle type of construction to optimise the air flow
- Full cross-section at the valve seat
- Extremely fast opening and closing
- Quiet operation thanks to built-in silencers (can be retrofitted in sizes 1 1/2- to 2 1/2)
- Easy maintenance and repair because diaphragm and wearing parts are instantly available

The valves are not suitable as shut-off devices for standard applications.

Ürün

Tanım	Mil	NW	A (mm)	B (mm)	Form
K- 07 30 22 29	G 3/4	25,0	75,0	89,0	1
K- 07 30 22 30	G 1	25,0	75,0	89,0	1
K- 07 30 22 31	G 1 1/2	52,0	80,0	130,0	2
K- 07 30 22 32	G 2	66,0	80,0	168,0	2
K- 07 30 22 33	G 2 1/2	66,0	80,0	168,0	2

Titiz kontrole rağmen hatalar önlenemez ve sorumluluk altında bırakmayan bilgiler hakkında hiçbir sorumluluk kabul edilmez.