


# K-SSV BR

Angle-seat valves with piston actuator

**HANSA FLEX**

## Özellikler

Basınç farkı	0 - 16 bar
Akışkan sıcaklığı	-10 °C to +180 °C
Kumanda havası bağlantısı	G 1/8
Sıcaklık kumanda maddesi	max. +60 °C
Ortam sıcaklığı	-20 °C to +70 °C
izin verilen statik basınç	Max. 16 bar
Valf mahfazası	Bronze
Bağlantı parçası	Stainless steel
Kumanda başı	Polyamide (glass fibre-reinforced)
Piston	Nickel-plated brass (DN 15 to DN 32), PBT + GF 30% (DN 40 to DN 50)
Mil	Stainless steel
Yalıtım malzemesi	PTFE

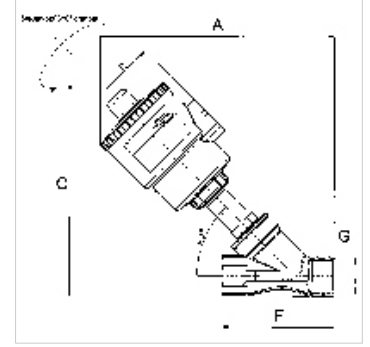

## Açıklama

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

Diğer bilgiler, istek üzerinedir.

## Açıklama

Angle-seat valves with external pilot control and a self-aligning valve disc for neutral (bronze body) or corrosive (stainless steel body) media. Very high flow due to angled seat design, Water hammer prevented by fluid entry under the disc, Suitable for vacuum operation (low vacuum), NAMUR interface on the piston actuator. 3/2 and 5/2-way valves can be mounted directly.

## Ek bilgiler

Other versions e.g. for steam on request

Information on max. operating differential pressures apply for air, gas, corrosive aggressive media, water

## Ürün

Tanım	A (mm)	C (mm)	F (mm)	Mil	maks. işletme basınç farkı (bar)	min. kumanda basıncı	maks. kumanda basıncı
K- 07 30 25 24	163,0	153,0	65,0	G 1/2	16	4	10
K- 07 30 25 25	173,0	163,0	75,0	G 3/4	10	4	10
K- 07 30 25 26	191,0	181,0	75,0	G 3/4	16	4	10
K- 07 30 25 27	206,0	196,0	90,0	G 1	11	4	10
K- 07 30 25 28	246,0	236,0	90,0	G 1	16	4	8
K- 07 30 25 29	255,0	245,0	110,0	G 1 1/4	14	4	8
K- 07 30 25 30	270,0	264,0	120,0	G 1 1/2	11	4	8
K- 07 30 25 31	306,0	300,0	120,0	G 1 1/2	16	4	8
K- 07 30 25 32	316,0	311,0	150,0	G 2	10	4	8