



# K-T-STUECKE IG 1 2

Tees, female-female-female

**HANSA FLEX**

## Özellikler

|                 |                              |
|-----------------|------------------------------|
| Çalışma basıncı | 60 bar                       |
| İşletim ısısı   | Max. 150 °C                  |
| Dişli iç        | Parallel to DIN EN ISO 228-1 |
| Malzeme         | Nikel kaplı pirinç           |

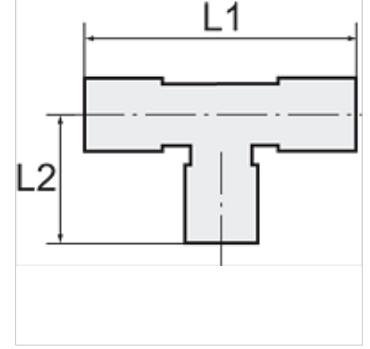

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Ürün

| Tanım          | Mil   | L1<br>(mm) | L2<br>(mm) | SW    |
|----------------|-------|------------|------------|-------|
| K- 07 40 48 92 | M 5   | 22,0       | 11,0       | 9 mm  |
| K- 07 40 11 04 | G 1/8 | 42,0       | 21,0       | 10 mm |
| K- 07 40 11 05 | G 1/4 | 51,0       | 25,5       | 13 mm |
| K- 07 40 11 06 | G 3/8 | 56,0       | 28,0       | 17 mm |
| K- 07 40 11 07 | G 1/2 | 67,0       | 33,5       | 21 mm |
| K- 07 40 11 14 | G 3/4 | 73,0       | 36,5       | 25 mm |
| K- 07 40 11 15 | G 1   | 90,0       | 45,0       | 30 mm |