



# K-T-STUECKE IG IG AG 2

Tees, female-female-male

**HANSA FLEX**

## Özellikler

|                 |                              |
|-----------------|------------------------------|
| Çalışma basıncı | 60 bar                       |
| İşletim ısısı   | Max. 150 °C                  |
| Dişli iç        | Parallel to DIN EN ISO 228-1 |
| Malzeme         | Nikel kaplı pirinç           |
| Dişli dış       | conical acc. DIN 2999        |

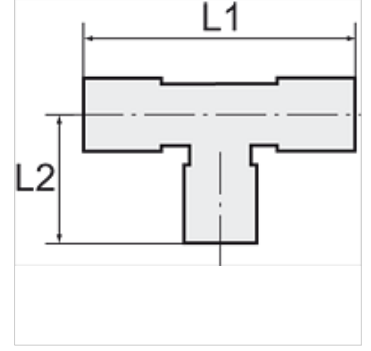

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Ürün

| Tanım          | Mil     | L1<br>(mm) | L2<br>(mm) | SW    |
|----------------|---------|------------|------------|-------|
| K- 07 40 48 94 | M 5     | 22,5       | 11,0       | 9 mm  |
| K- 07 40 11 16 | G/R 1/8 | 39,5       | 21,0       | 10 mm |
| K- 07 40 11 17 | G/R 1/4 | 49,0       | 23,5       | 13 mm |
| K- 07 40 11 18 | G/R 3/8 | 54,0       | 28,0       | 17 mm |
| K- 07 40 11 19 | G/R 1/2 | 64,5       | 33,5       | 21 mm |
| K- 07 40 11 20 | G/R 3/4 | 69,5       | 36,5       | 25 mm |
| K- 07 40 11 21 | G/R 1   | 84,0       | 45,0       | 30 mm |