


K-W90 STUECK AG IG 2

Elbows, male-female

HANSA FLEX

Özellikler

| | |
|-----------------|------------------------------|
| Çalışma basıncı | 60 bar |
| İşletim ısısı | Max. 150 °C |
| Dişli iç | Parallel to DIN EN ISO 228-1 |
| Malzeme | Nikel kaplı pirinç |
| Dişli dış | conical acc. DIN 2999 |

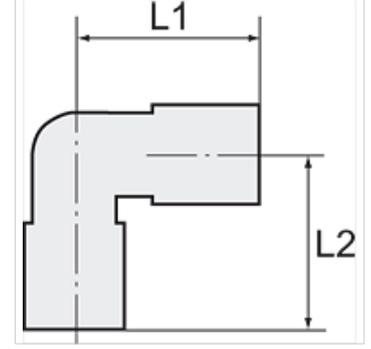

Açıklama

Diğer bilgiler, istek üzerinedir.

Ürün

| Tanım | Mil | L1 (mm) | L2 (mm) | SW |
|----------------|---------|------------|------------|-------|
| K- 07 40 48 91 | M 5 | 11,5 | 11,0 | 9 mm |
| K- 07 40 10 90 | G/R 1/8 | 18,5 | 21,0 | 10 mm |
| K- 07 40 10 91 | G/R 1/4 | 23,5 | 25,5 | 13 mm |
| K- 07 40 10 92 | G/R 3/8 | 26,0 | 28,0 | 17 mm |
| K- 07 40 10 93 | G/R 1/2 | 31,0 | 33,5 | 21 mm |
| K- 07 40 10 94 | G/R 3/4 | 33,0 | 36,5 | 25 mm |
| K- 07 40 10 95 | G/R 1 | 39,0 | 45,0 | 30 mm |