


Özellikler

Çalışma basıncı maks. 10 bar

Sıcaklık sahisi -20 °C to +80 °C

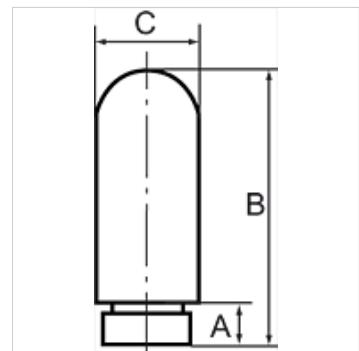

Açıklama

Important: The air flowing through the silencer is cooled down. at temperatures below zero, the moisture in the air can freeze, causing the pores of the silencer to close up.

Diğer bilgiler, istek üzerinedir.

Ürün

Tanım	Mil	A (mm)	B (mm)	C (mm)
K-07 40 46 90	M 5	5,0	25,0	7,0
K-07 40 40 61	G 1/8	7,0	32,0	13,0
K-07 40 40 62	G 1/4	8,0	39,0	17,0
K-07 40 40 63	G 3/8	11,0	65,0	25,0
K-07 40 40 64	G 1/2	11,5	70,0	25,0
K-07 40 40 65	G 3/4	15,5	138,0	37,0
K-07 40 40 66	G 1	19,5	158,0	48,0