


# K-W90 AG-K POLYAMID ISO 7-1

Male stud elbows, polyamide, conical male thread acc. to ISO 7-1

**HANSA FLEX**

## Özellikler

Sıcaklık sahası -40 °C to +90 °C

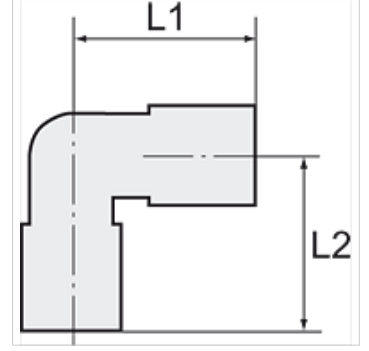

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Açıklama

Lightweight tube connectors distinguished by high strength, toughness, resistance to abrasion and impact resistance. Resistant to: Acetone, benzene, benzene, butane, alcohols, diesel fuels, crude oil, natural gas, ethanol, fruit juices, glycerine, fuel oil, hydraulic fluids, aliphatic ketones, carbon dioxide, carbonic acid, engine oils, methanol, propane, liquefied gas, lubricating oils, lubricating greases, town gas, washing liquor and water.

## Ürün

Tanım	Mil	Hortum için	L1 (mm)	L2 (mm)	izin verilen maks. yüksek basınç (bar)	SW
K- 07 40 16 84	R 1/8	LW 4 mm	16,0	21,0	10	10 mm
K- 07 40 16 85	R 1/8	LW 6 mm	21,0	28,5	10	10 mm
K- 07 40 46 54	R 1/8	LW 8 mm	23,0	33,0	10	14 mm
K- 07 40 16 86	R 1/4	LW 4 mm	25,0	21,0	10	14 mm
K- 07 40 16 87	R 1/4	LW 6 mm	26,0	28,5	10	14 mm
K- 07 40 16 88	R 1/4	LW 8 mm	27,5	33,0	10	14 mm
K- 07 40 16 89	R 1/4	LW 10 mm	30,0	38,0	10	14 mm
K- 07 40 16 90	R 3/8	LW 6 mm	27,0	28,5	10	17 mm
K- 07 40 16 91	R 3/8	LW 8 mm	31,0	36,0	10	17 mm
K- 07 40 16 92	R 3/8	LW 10 mm	30,0	38,0	10	17 mm
K- 07 40 16 93	R 3/8	LW 12 mm	31,0	40,5	10	17 mm
K- 07 40 16 94	R 1/2	LW 8 mm	36,0	36,0	10	22 mm
K- 07 40 16 95	R 1/2	LW 12 mm	36,0	40,5	10	22 mm
K- 07 40 46 55	R 3/4	LW 19 mm	42,8	45,5	10	27 mm