

K-SWR AG OR

Banjo elbows, parallel male thread with O-ring


HANSA FLEX

Özellikler

Basınç aralığı Max. 60 bar

Sıcaklık Max. 150 °C

Malzeme Nikel kaplı pirinç

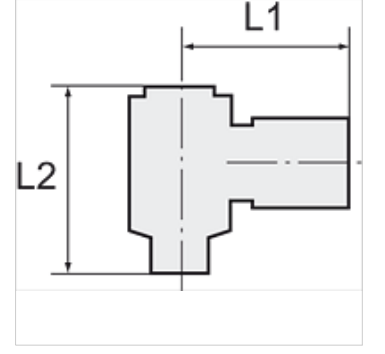

Açıklama

Diğer bilgiler, istek üzerinedir.

Ürün

| Tanım | Borunun dış çapı | Mil | L1 (mm) | L2 (mm) | SW | SW1 (mm) |
|----------------|------------------|-------|------------|------------|-------|-------------|
| K- 07 40 20 55 | 6 mm | G 1/8 | 26,5 | 28,0 | 14 mm | 12 |
| K- 07 40 20 56 | 8 mm | G 1/8 | 25,5 | 28,0 | 14 mm | 14 |
| K- 07 40 20 57 | 6 mm | G 1/4 | 28,5 | 29,5 | 17 mm | 12 |
| K- 07 40 20 58 | 8 mm | G 1/4 | 28,0 | 29,5 | 17 mm | 14 |