

K-GAM IG 3

Female connectors, female thread



HANSA FLEX

Özellikler

Çalışma basıncı Max. 18 bar

Yalıtım malzemesi Buna-N

Malzeme Nikel kaplı pirinç

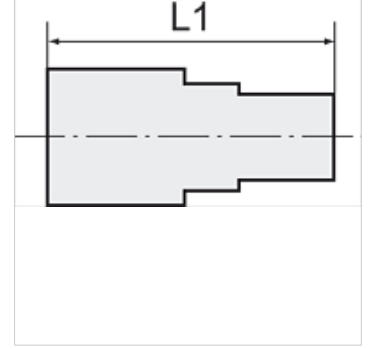

Açıklama

Diğer bilgiler, istek üzerinedir.

Ürün

| Tanım | Mil | Hortum için | L1 (mm) | SW |
|----------------|-------|---------------|------------|-------|
| K- 07 40 31 01 | G 1/8 | 6 mm / 4 mm | 26,5 | 14 mm |
| K- 07 40 31 02 | G 1/8 | 8 mm / 6 mm | 26,5 | 14 mm |
| K- 07 40 30 99 | G 1/4 | 6 mm / 4 mm | 29,5 | 17 mm |
| K- 07 40 31 00 | G 1/4 | 8 mm / 6 mm | 29,0 | 17 mm |
| K- 07 40 30 98 | G 1/4 | 10 mm / 8 mm | 31,0 | 17 mm |
| K- 07 40 31 05 | G 3/8 | 6 mm / 4 mm | 29,5 | 20 mm |
| K- 07 40 31 06 | G 3/8 | 8 mm / 6 mm | 33,0 | 20 mm |
| K- 07 40 31 03 | G 3/8 | 10 mm / 8 mm | 35,0 | 20 mm |
| K- 07 40 31 04 | G 3/8 | 12 mm / 10 mm | 32,5 | 20 mm |
| K- 07 40 30 97 | G 1/2 | 8 mm / 6 mm | 33,0 | 24 mm |
| K- 07 40 30 96 | G 1/2 | 10 mm / 8 mm | 38,0 | 24 mm |