



# K-GAM IG 4

Female connectors, female thread

**HANSA FLEX**

## Özellikler

|                          |                    |
|--------------------------|--------------------|
| maks. işletme basıncı    | 18 bar             |
| kullanılabilir hortumlar | PA, PE, PU         |
| Malzeme                  | Nikel kaplı pirinç |

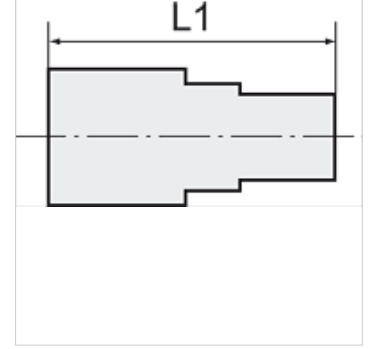

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Ürün

| Tanım          | Mil   | Hortum için  | L1<br>(mm) | SW    |
|----------------|-------|--------------|------------|-------|
| K- 07 40 33 77 | G 1/8 | 6 mm / 4 mm  | 25,0       | 14 mm |
| K- 07 40 33 78 | G 1/8 | 8 mm / 6 mm  | 25,0       | 14 mm |
| K- 07 40 33 75 | G 1/4 | 6 mm / 4 mm  | 29,0       | 17 mm |
| K- 07 40 33 76 | G 1/4 | 8 mm / 6 mm  | 29,0       | 17 mm |
| K- 07 40 33 74 | G 1/4 | 10 mm / 8 mm | 30,5       | 17 mm |
| K- 07 40 33 73 | G 1/2 | 8 mm / 6 mm  | 33,0       | 24 mm |
| K- 07 40 33 72 | G 1/2 | 10 mm / 8 mm | 34,5       | 24 mm |
| K- 07 40 33 80 | G 3/8 | 6 mm / 4 mm  | 29,5       | 20 mm |
| K- 07 40 33 81 | G 3/8 | 8 mm / 6 mm  | 29,5       | 20 mm |
| K- 07 40 33 79 | G 3/8 | 10 mm / 8 mm | 31,0       | 20 mm |