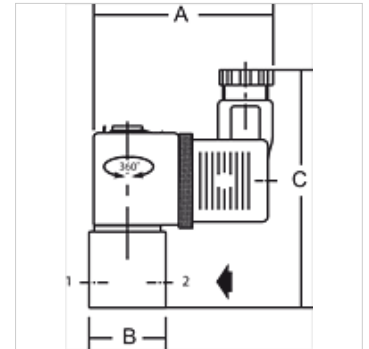


Proportional valves for controlling the flow of air / gas / water / oil, 24 VDC, closed when de-energised

A black ASCO solenoid valve assembly mounted on a yellow brass body. The valve has a label with technical specifications and a flow direction arrow pointing right, labeled "FLOW" and "MOT".

Diğer bilgiler, istek üzerinedir.

Ever increasing requirements with regard to quality, precision, productivity, convenience, user friendliness and service represent tough challenges for industrial plant and production facilities. These challenges can only be mastered if physical quantities such as temperature, pressure, force, speed, torque, etc. are optimally adapted to the operating conditions of each installation. Stepless adjustment of these parameters is vital.

Ek bilgiler

We recommend combining these proportional valves with a plug amplifier, type K-07250999 or K-07251000

We recommend combining these proportional valves with a plug amplifier, type K-07250999 or K-07251000

Ürün

Tanım	Bağlantı	DN	maks. işletme basınç farkı (bar)	A (mm)	B	C (mm)
K- 07 25 09 89	G 1/8	1	5	59,0	25,0 mm	78,0
K- 07 25 09 90	G 1/8	2	4	59,0	25,0 mm	78,0