



# K-DRGREDV

## Pressure reducing valves

**HANSA FLEX**

### Özellikler

Giriş basıncı	Max. 15 bar
Bağlantı	G 1/4 internal / external
Malzeme	Pirinç

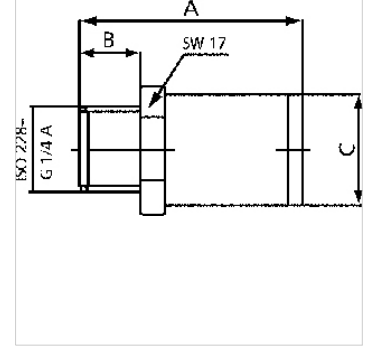

### Açıklama

Dependent on the input pressure P1, the initial pressure P2 can vary between -20% to +20%  
Diğer bilgiler, istek üzerinedir.

### Açıklama

Industry, trade and repair shops often require working pressures of 15 bar or less. These pressure reducing valves, which are screwed directly onto the tool, enable the actually necessary working pressure to be set. <br>Benefits: Significantly reduced risk of accidents, Longer tool life with fewer malfunctions, Lower noise levels at the workplace.

### Ürün

Tanım	Ayar basıncı	maks. akış (L/min)	A (mm)	B	Ø C (mm)	SW (mm)
K- 07 25 19 31	2,0	300	34,0	9,0 mm	17,0	17
K- 07 25 02 00	3,0	360	34,0	9,0 mm	17,0	17
K- 07 25 02 01	4,0	380	34,0	9,0 mm	17,0	17
K- 07 25 02 02	5,0	390	34,0	9,0 mm	17,0	17
K- 07 25 02 03	6,0	405	34,0	9,0 mm	17,0	17
K- 07 25 19 32	7,0	415	34,0	9,0 mm	17,0	17
K- 07 25 19 33	8,0	420	34,0	9,0 mm	17,0	17