


K-PRAEZI DRUCKREGLER SELU

Precision pressure regulators

HANSA FLEX

Özellikler

| | |
|-------------------------|--|
| Giriş basıncı | Max. 16 bar |
| Akışkan sıcaklığı | max. 60 °C |
| Ortam sıcaklığı | Max. 60 °C |
| Akışkanlar | Micro-filtered, unoiled compressed air (0.01 µm) |
| Bağlantı manometre | G 1/4 |
| Hava tahliye bağlantısı | G 3/8 (for mounting a silencer) |
| Yalıtım malzemesi | NBR |
| Gövde | Die-cast zinc |
| Öz hava tüketimi | 1.5 - 6 l/min, depending on input pressure and control range |

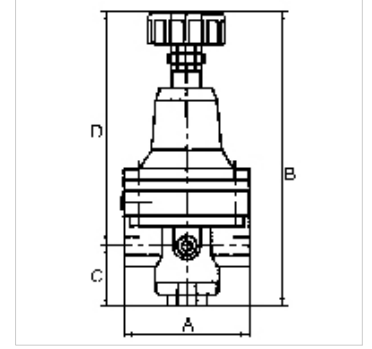

Açıklama

The given flow rates are based on the following parameters: 1200 l/min: P1: 5 bar, P2: 3 bar, $\Delta p \leq 0.1$ bar

1400 l/min: P1: 7 bar, P2: 5 bar, $\Delta p \leq 0.1$ bar

1500 l/min: P1: 10 bar, P2: 7 bar, $\Delta p \leq 0.1$ bar. Wear parts kit not supplied! Pressure regulator may only be opened in the factory!

Diğer bilgiler, istek üzerinedir.

Açıklama

With high flow rate and large secondary relief port. Diaphragm pressure regulators with large secondary relief port for applications requiring an extremely accurate working pressure, especially at high flow rates.

Ek bilgiler

on Art. K-07250721: Max. inlet pressure 300 bar. Other cylinder pressure regulators available on request.

1500 l/min: P1: 10 bar, P2: 7 bar, $\Delta p \leq 0.1$ bar.

Ürün

| Tanım | Mil | Ayar aralığı | Akış (L/min) | A (mm) | C (mm) | TR (mm) |
|----------------|-------|--------------|--------------|--------|--------|---------|
| K- 07 25 09 28 | G 1/4 | 0.05 - 3 bar | 700 | 82,0 | 43,5 | 159,0 |
| K- 07 25 09 29 | G 1/4 | 0.05 - 7 bar | 1500 | 82,0 | 43,5 | 159,0 |
| K- 07 25 09 30 | G 3/8 | 0.05 - 3 bar | 3000 | 82,0 | 43,5 | 159,0 |
| K- 07 25 09 31 | G 3/8 | 0.05 - 7 bar | 5500 | 82,0 | 43,5 | 159,0 |
| K- 07 25 09 32 | G 1/2 | 0.05 - 3 bar | 3000 | 82,0 | 43,5 | 159,0 |
| K- 07 25 09 33 | G 1/2 | 0.05 - 5 bar | 4500 | 82,0 | 43,5 | 159,0 |
| K- 07 25 09 34 | G 1/2 | 0.05 - 7 bar | 5500 | 82,0 | 43,5 | 159,0 |

Yedek Parçalar

| | |
|--------------------------|--------------------------------------|
| K-HALTERBAUSATZ STANDARD | Holder |
| K-KM MS | Hexagonal lock nuts, brass |
| K-SCHALLDAEPFER VYON | Vyon silencers |
| K-FILTERELEMENT | Filter element |
| K-XV AGM 2 | Double nipples, parallel male thread |