


# K-BEFUELLEINHEIT 24VDC HANSA

Filling units, electrically operated, with 24 VDC / 2.5 W solenoid, adjustable filling time

**HANSA FLEX**

## Özellikler

|                                       |   |
|---------------------------------------|---|
| Giriş basıncı                         | 2 - 10 bar                                      |
| Sıcaklık sahası                       | -10 °C to +50 °C                                |
| Akışkanlar                            | Basıncılı hava                                  |
| Sıkma kapasitesi alternatif akım 50Hz | 2,2 VA  |
| Açık durma süresi                     | ED 100 %  |
| Elektrik bağlantısı                   | Connector type C, ISO 15217, 2 poles + PE       |
| Tutma çubuğu alternatif akım 50Hz     | 1,6 VA  |
| Güç tüketimi DC                       | 2,5 W   |
| Koruma sınıfı                         | IP 65   |
| Bağlantı vida dişi                    | Material: Die-cast zinc                         |
| Gövde                                 | Material: Grivory® (PA 66)                      |
| Akış değeri ölçümü                    | At P2 = 6 bar, pressure drop $\Delta p = 1$ bar |

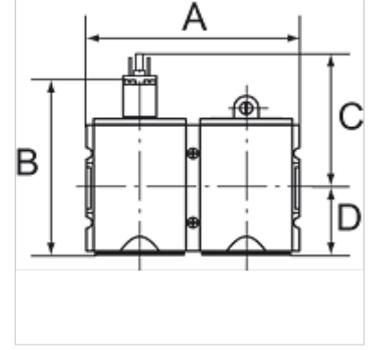

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Açıklama

The filling unit protects devices connected downstream by ensuring a gradual build-up of pressure. The unit consists of a 3/2-way valve and a filling valve (start-up valve). It is connected and disconnected by means of the 3/2-way valve. The filling time can be altered by turning the adjusting screw.

## Siparişe ilgili bilgiler

Filling units are also available with coil 110 V AC, 50 Hz and in a pneumatically operated version. Please ask for more information.

## Ürün

| Tanım          | Mil   | Çıkış | Akış (L/min) | A (mm) | B        | C (mm) | TR (mm) |
|----------------|-------|-------|--------------|--------|----------|--------|---------|
| K- 07 25 10 99 | G 1/4 | 1/4   | 1300         | 104,0  | 117,8 mm | 84,8   | 33,0    |
| K- 07 25 11 00 | G 3/8 | 1/4   | 1300         | 104,0  | 117,8 mm | 84,8   | 33,0    |
| K- 07 25 11 25 | G 3/8 | 1/2   | 3400         | 126,0  | 150,3 mm | 93,8   | 56,5    |
| K- 07 25 11 26 | G 1/2 | 1/2   | 3400         | 126,0  | 150,3 mm | 93,8   | 56,5    |
| K- 07 25 11 47 | G 3/4 | 1/2   | 8750         | 170,0  | 177,7 mm | 110,7  | 67,0    |
| K- 07 25 11 48 | G 1   | 1/2   | 8750         | 170,0  | 177,7 mm | 110,7  | 67,0    |

## Aksesuar

|                             |   |
|-----------------------------|---|
| K-SCHALLDAE SINTERBR S      | Silencers, sintered bronze, slotted                                 |
| K-SCHALLDAE SINTERBR GE MS1 | Silencers, sintered bronze, with brass hexagon nut and brass thread |

## Yedek Parçalar

|                         |                            |
|-------------------------|----------------------------|
| K-HALTERBAUSATZ HANSA   | Holder HANSA               |
| K-VORSTEUERVENTIL HANSA | Replacement solenoid HANSA |
| K-GERAETESTECKER FORM C | Connector                  |