


K-FI REGL PC-BEHAEL MANO MULTIFIX

Filter regulators with polycarbonate bowl and pressure gauge

HANSA FLEX

Özellikler

Giriş basıncı	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
Akışkan sıcaklığı	max. 60 °C
Ortam sıcaklığı	Max. 60 °C
Filtre ünitesindeki delik genişliği	5 µm (C55: 40 µm)
Yalıtım malzemesi	NBR
Yay kapağı	POM-brass
Gövde	Die-cast zinc, Aluminium for G 1 variant
Drain valve	Semi-automatic
Akış değeri ölçümü	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar

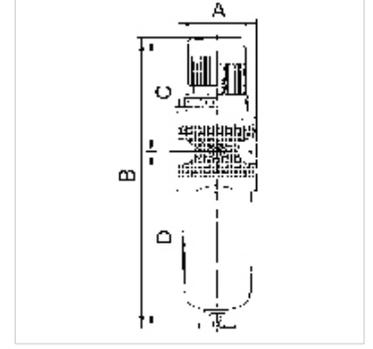

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

Reversible diaphragm pressure regulators, independent of inlet pressure, with secondary ventilation, in combination with a centrifugal separator. The pressure setting can be locked by pressing in the handwheel.

Siparişe ilgili bilgiler

Filter regulators with bowl guard and metal bowl are also available with control ranges of 0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar. Please ask for more information. Lockable filter regulators available on request.

Ürün

Tanım	Mil	Ayar aralığı	Akış (L/min)	A (mm)	B	C (mm)	TR (mm)	DN	Model ebadı
K- 07 25 00 70	G 1/4	0.1 - 3 bar	1500	47,8	192,1 mm	67,0	125,1	6	1
K- 07 25 19 40	G 1/4	0.2 - 6 bar	1500	47,8	192,1 mm	67,0	125,1	6	-
K- 07 25 00 69	G 1/4	0.5 - 10 bar	1500	47,8	192,1 mm	67,0	125,1	6	1
K- 07 25 19 39	G 1/4	0.5 - 16 bar	1500	47,8	192,1 mm	67,0	125,1	6	-
K- 07 25 00 74	G 3/8	0.1 - 3 bar	1500	47,8	192,1 mm	67,0	125,1	10	1
K- 07 25 19 42	G 3/8	0.2 - 6 bar	1500	47,8	192,1 mm	67,0	125,1	10	-
K- 07 25 00 73	G 3/8	0.5 - 10 bar	1500	47,8	192,1 mm	67,0	125,1	10	1
K- 07 25 19 41	G 3/8	0.5 - 16 bar	1500	47,8	192,1 mm	67,0	125,1	10	-
K- 07 25 00 78	G 1/2	0.1 - 3 bar	3500	68,8	246,3 mm	99,0	147,3	15	2
K- 07 25 19 44	G 1/2	0.2 - 6 bar	3500	68,8	246,3 mm	99,0	147,3	15	-
K- 07 25 00 77	G 1/2	0.5 - 10 bar	3500	68,8	246,3 mm	99,0	147,3	15	2
K- 07 25 19 43	G 1/2	0.5 - 16 bar	3500	68,8	246,3 mm	99,0	147,3	15	-
K- 07 25 00 82	G 3/4	0.1 - 3 bar	3500	68,8	246,3 mm	99,0	147,3	20	2
K- 07 25 19 46	G 3/4	0.2 - 6 bar	3500	68,8	246,3 mm	99,0	147,3	20	-
K- 07 25 00 81	G 3/4	0.5 - 10 bar	3500	68,8	246,3 mm	99,0	147,3	20	2
K- 07 25 19 45	G 3/4	0.5 - 16 bar	3500	68,8	246,3 mm	99,0	147,3	20	-
K- 07 25 00 86	G 1	0.1 - 3 bar	12000	100,0	381,8 mm	128,0	253,8	25	3
K- 07 25 19 48	G 1	0.2 - 6 bar	12000	100,0	381,8 mm	128,0	253,8	25	-
K- 07 25 00 85	G 1	0.5 - 10 bar	12000	100,0	381,8 mm	128,0	253,8	25	3
K- 07 25 19 47	G 1	0.5 - 16 bar	12000	100,0	381,8 mm	128,0	253,8	25	-

Yedek Parçalar

K-HALTERBAUSATZ	Holder
K-SCHALTTAFELMUTTER	Nut
K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-METALLBEHAELTER OELER MULTIFIX	Metal tank oiler
K-PC-BEHAELTER FILTER MULTIFIX	Polycarbonate tank filter
K-SCHUTZKORB G	Protective cage



Titiz kontrole rağmen hatalar önlenemez ve sorumluluk altında bırakmayan bilgiler hakkında hiçbir sorumluluk kabul edilmez.

27.05.2026

HANSA-FLEX AG

www.hansa-flex.com

1

K-FI REGL PC-BEHAEL MANO MULTIFIX

Filter regulators with polycarbonate bowl and pressure gauge

HANSA FLEX