


# K-FI REGL METALLBEHAE S MANO MULTIF

Filter regulators with metal bowl and sight glass, incl. pressure gauge

**HANSA FLEX**

## Özellikler

|                                     |                                                            |
|-------------------------------------|------------------------------------------------------------|
| Giriş basıncı                       | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Akışkan sıcaklığı                   | max. 60 °C                                                 |
| Ortam sıcaklığı                     | Max. 60 °C                                                 |
| Filtre ünitesindeki delik genişliği | 5 µm (C55: 40 µm)                                          |
| Yalıtım malzemesi                   | NBR                                                        |
| Yay kapağı                          | POM-brass                                                  |
| Gövde                               | Die-cast zinc, Aluminium for G 1 variant                   |
| Drain valve                         | Semi-automatic                                             |
| Akış değeri ölçümü                  | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar     |

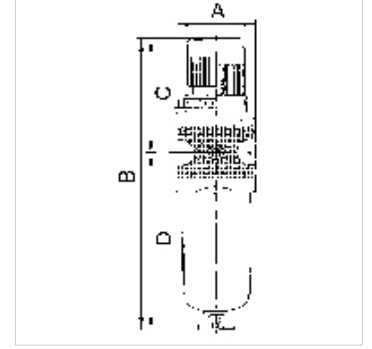

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Açıklama

Reversible diaphragm pressure regulators, independent of inlet pressure, with secondary ventilation, in combination with a centrifugal separator. The pressure setting can be locked by pressing in the handwheel.

## Siparişe ilgili bilgiler

Filter regulators with bowl guard and metal bowl are also available with control ranges of 0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar. Please ask for more information. Lockable filter regulators available on request.

## Ürün

| Tanım          | Mil   | Ayar aralığı | Akış (L/min) | A (mm) | B        | C (mm) | TR (mm) | DN | Model ebadı |
|----------------|-------|--------------|--------------|--------|----------|--------|---------|----|-------------|
| K- 07 25 00 68 | G 1/4 | 0.5 - 10 bar | 1500         | 47,8   | 192,0 mm | 67,0   | 125,5   | 6  | 1           |
| K- 07 25 00 72 | G 3/8 | 0.5 - 10 bar | 1500         | 47,8   | 192,0 mm | 67,0   | 125,5   | 10 | 1           |
| K- 07 25 00 76 | G 1/2 | 0.5 - 10 bar | 3500         | 68,8   | 246,0 mm | 99,0   | 149,2   | 15 | 2           |
| K- 07 25 00 80 | G 3/4 | 0.5 - 10 bar | 3500         | 68,8   | 246,0 mm | 99,0   | 149,2   | 20 | 2           |
| K- 07 25 00 84 | G 1   | 0.5 - 10 bar | 12000        | 100,0  | 385,0 mm | 128,0  | 255,7   | 25 | 3           |

## Yedek Parçalar

|                                  |                           |
|----------------------------------|---------------------------|
| K-HALTERBAUSATZ                  | Holder                    |
| K-SCHALTTAFELMÜTTER              | Nut                       |
| K-HALTERBAUSATZ MULTIFIX         | Holder                    |
| K-KOPPELPAKET MEHR               | Coupling packet           |
| K-KOPPELPAKET SCHMA              | Coupling packet           |
| K-METALLBEHAELTER OELER MULTIFIX | Metal tank oiler          |
| K-PC-BEHAELTER FILTER MULTIFIX   | Polycarbonate tank filter |
| K-SCHUTZKORB G                   | Protective cage           |
| K-VERSCHLEI-SATZ                 | Set of wearing parts      |
| K-FILTERELEMENT                  | Filter element            |
| K-AUTOMAT ABLASSVENTIL           | Automatic drain valve     |