K-SCHALTVENTILE 3/2 MULTIFIX MINI


On-off valves (3/2-way valves)

HANSA-FLEX

Özellikler

Giriş basıncı	Min. 2 bar, max. 10 bar
Akışkan sıcaklığı	max. 60 °C
Ortam sıcaklığı	Max. 60 °C
Elektrik bağlantısı	Device plug PG 9, type B, EN 175301-803
Koruma sınıfı	IP 65 (P 54) acc. to DIN 40050
Akış	1600 l/min
Çalıştırma süresi nispi	100 %
Hava tahliye bağlantısı	Silencer G 1/4
Yalıtım malzemesi	NBR
Gövde	Die-cast zinc
Akış değeri ölçümü	At P1 = 6 bar and pressure drop Δp = 1 bar



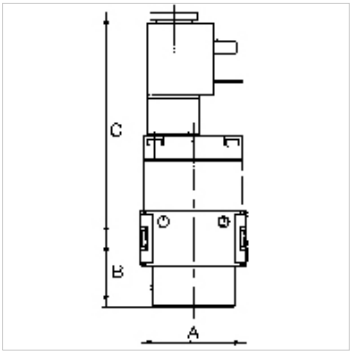

Açıklama

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.
Diğer bilgiler, istek üzerinedir.

Açıklama

Pneumatic systems or parts of systems can be switched on and off by means of anelectrical signal. When they are switched off, the system is relieved at the same time.

Ürün

Tanım	Mil	Manyetik bobin	A (mm)	B	C (mm)	Model ebadı
K- 07 25 11 62	G 1/4	230 V AC, 50 Hz	45,0	29,0 mm	96,0	0
K- 07 25 11 63	G 1/4	110 V AC, 50 Hz	45,0	29,0 mm	96,0	0
K- 07 25 11 64	G 1/4	24 V DC	45,0	29,0 mm	96,0	0

Yedek Parçalar

K-KOPPELPAKET MEHR	Coupling packet
K-GERAETESTECKER	Coupling socket
K-AUTOMAT ABLASSVENTIL	Automatic drain valve
K-MAGNETSPULE MULTIFIX	Solenoid
K-SCHALLDAE SINTERBR SCHLITZ	Silencers, sintered bronze, slotted

Titiz kontrole rağmen hatalar önlenemez ve sorumluluk altında bırakmayan bilgiler hakkında hiçbir sorumluluk kabul edilmez.