


K-WTEH 3-TLG PC MULTIFIX MINI

Service units, 3-piece with polycarbonate bowl

HANSA FLEX

Özellikler

| | |
|-------------------------------------|---|
| Giriş basıncı | Max. 12 bar (also for metal tank!) |
| Akışkan sıcaklığı | max. 60 °C |
| Ortam sıcaklığı | Max. 60 °C |
| Filtre ünitesindeki delik genişliği | 5 µm |
| Yalıtım malzemesi | NBR |
| Yay kapağı | POM-brass |
| Gövde | Die-cast zinc |
| Damla örtüsü | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl) |
| Drain valve | Semi-automatic |
| Akış değeri ölçümü | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |

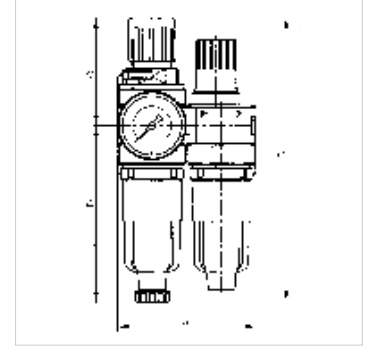

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

Two or three-piece service units consisting of a diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator.

Siparişe ilgili bilgiler

Lockable service units available on request. If several devices in the »multiflex-mini« Series are assembled together, the maximum working pressure is 12 bar.

Ürün

| Tanım | Mil | Ayar aralığı | Akış (L/min) | A (mm) | B | C (mm) | TR (mm) | DN | Model ebadı |
|----------------|-------|--------------|--------------|--------|----------|--------|---------|----|-------------|
| K- 07 25 01 06 | G 1/8 | 0.5 - 10 bar | 700 | 120,0 | 165,5 mm | 63,0 | 102,5 | 5 | 0 |
| K- 07 25 01 08 | G 1/4 | 0.5 - 10 bar | 700 | 120,0 | 165,5 mm | 63,0 | 102,5 | 5 | 0 |

Yedek Parçalar

| | |
|--------------------------------|---|
| K-HALTERBAUSATZ | Holder |
| K-AUTOMAT ABLASSVENTIL | Automatic drain valve |
| K-SCHALTTAFELMUTTER | Nut |
| K-KOPPELPAKET MEHR | Coupling packet |
| K-ERSATZBEHAELTER MULTI MINI | Spare tank »multiflex-mini« & »standard-mini« |
| K-PC-BEHAELTER FILTER MULTIFIX | Polycarbonate tank filter |
| K-FILTERELEMENT | Filter element |
| K-VERSCHLEI-SATZ | Set of wearing parts |
| K-TROPFAUFSATZ POLYCARBO 1 | Drip attachment polycarbonate |
| K-TROPFAUFSATZ METALL | Drip attachment metal |