


K-WTEH 2-TLG PC SCHU H ABL STANDARD

Service units with polycarbonate bowl, bowl guard and semi-automatic drain valve

HANSA FLEX

Özellikler

| | |
|-------------------------------------|--|
| Giriş basıncı | Max. 16 bar (polycarbonate bowl / bowl guard), Max. 25 bar (metal bowl) |
| Ayar aralığı | 0.5 to 10 bar (polycarbonate bowl / bowl guard) 0.5 to 16 bar (metal bowl) |
| Akışkan sıcaklığı | max. 60 °C |
| Ortam sıcaklığı | Max. 60 °C |
| Filtre ünitesindeki delik genişliği | 5 µm (Size 1 / Size 3), 40 µm (Size 2 / Size 4) |
| Yalıtım malzemesi | NBR |
| Gövde | Die-cast zinc / Aluminium, painted silver |
| Damla örtüsü | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl) |
| Akış değeri ölçümü | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

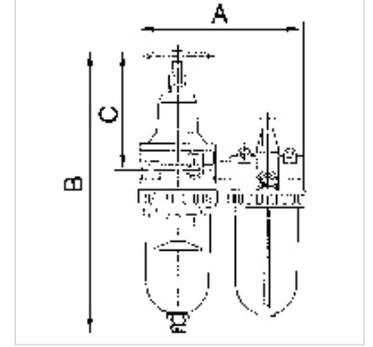

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

Two-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator.

Ürün

| Tanım | Mil | Akış (L/min) | A (mm) | B | C (mm) | DN | Ø manometre |
|----------------|-------|--------------|--------|----------|--------|----|-------------|
| K- 07 25 14 95 | G 1/4 | 600 | 117,0 | 236,2 mm | 106,5 | 6 | 50 |
| K- 07 25 14 98 | G 3/8 | 600 | 117,0 | 236,2 mm | 106,5 | 6 | 50 |
| K- 07 25 15 01 | G 3/8 | 800 | 150,0 | 266,4 mm | 120,5 | 10 | 63 |
| K- 07 25 15 04 | G 1/2 | 2100 | 175,0 | 299,4 mm | 130,0 | 15 | 63 |
| K- 07 25 15 07 | G 3/4 | 4000 | 220,0 | 452,0 mm | 190,6 | 20 | 63 |
| K- 07 25 15 10 | G 1 | 4000 | 220,0 | 452,0 mm | 190,6 | 25 | 63 |

Yedek Parçalar

| | |
|----------------------------|---|
| K-HALTERBAUSATZ STANDARD | Holder |
| K-SCHUTZKORB G | Protective cage |
| K-VERSCHLEI-SATZ | Set of wearing parts |
| K-FILTERELEMENT | Filter element |
| K-TROPFAUFSATZ POLYCARBO | Drip attachment polycarbonate |
| K-XV AGM MS NI | Double nipples, parallel male thread, nickel-plated brass |
| K-RD NIPPEL MS NI | Reducing nipples - nickel-plated brass |
| K-LOESBARE DOPPELNIPPEL MS | Double nipples |
| K-TROPFAUFSATZ METALL | Drip attachment metal |
| K-ABLASSVENTIL AUTO | Fully-automatic drain valve with Adapter G 1/8 |
| K-AUTOMAT ABLASSVENTIL | Automatic drain valve |