


# K-WTEH 2-TLG PC-BEHAEL VARIOBLOC

Service units, 2-piece with polycarbonate bowl

**HANSA FLEX**

## Özellikler

|  |   |
|--|---|
| <b>Giriş basıncı</b>                       | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)      |
| <b>Akışkan sıcaklığı</b>                   | max. 50 °C  |
| <b>Ortam sıcaklığı</b>                     | Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl)        |
| <b>Filtre ünitesindeki delik genişliği</b> | 40 µm   |
| <b>Yalıtım malzemesi</b>                   | NBR   |
| <b>Yay kapağı</b>                          | POM   |
| <b>Gövde</b>                               | Die-cast zinc   |
| <b>Membran</b>                             | NBR   |
| <b>Damla örtüsü</b>                        | PA  |
| <b>Drain valve</b>                         | Manual  |
| <b>Akış değeri ölçümü</b>                  | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

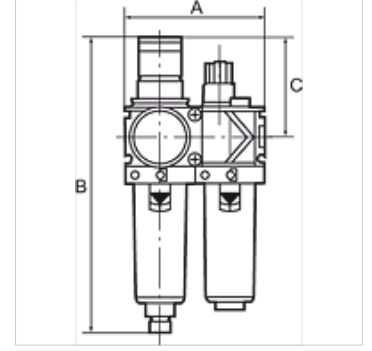

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Açıklama

Two or three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

## Siparişe ilgili bilgiler

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges (0.5 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

## Ek bilgiler

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges.

## Ürün

| Tanım          | Mil   | Ayar aralığı | Akış (L/min) | A (mm) | B        | C (mm) |
|----------------|-------|--------------|--------------|--------|----------|--------|
| K- 07 25 13 85 | G 1/4 | 0.5 - 10 bar | 1500         | 96,0   | 203,0 mm | 68,0   |
| K- 07 25 13 87 | G 3/8 | 0.5 - 10 bar | 1800         | 96,0   | 203,0 mm | 68,0   |
| K- 07 25 13 89 | G 1/2 | 0.5 - 10 bar | 3400         | 140,0  | 273,0 mm | 98,0   |
| K- 07 25 13 91 | G 3/4 | 0.5 - 10 bar | 5000         | 140,0  | 273,0 mm | 98,0   |
| K- 07 25 13 93 | G 1   | 0.5 - 10 bar | 5000         | 194,0  | 273,0 mm | 98,0   |

## Yedek Parçalar

|                                  |  |
|----------------------------------|--|
| K-VERSCHLEI-SATZ VARIOBLOC       | Set of wearing parts                           |
| K-FILTRELEMENT VARIOBLOC         | Filter element                                 |
| K-TROPFAUFSATZ VARIOBLOC         | Drip attachment                                |
| K-ERSATZBEHAELTER VARIOBLOC POLY | Spare tank Polycarbonat                        |
| K-ABLASSVENTIL AUTO              | Fully-automatic drain valve with Adapter G 1/8 |
| K-TROPFAUFSATZ METALL            | Drip attachment metal                          |