


K-KURZH ZYL DOPPELW ACP

Short-stroke cylinders, double acting (magnetic, non-cushioned)

HANSA FLEX

Özellikler

Akışkanlar	Filtered compressed air, lubricated (ensure continuity) or unlubricated
Çalışma basıncı	maks. 10 bar
Tepki verme basıncı	0,6 bar (Ø 12 bis Ø 32), 0,4 bar (Ø 40 bis Ø 80)
Sıcaklık sahası	-10 °C to +80 °C
Piston çubuğu	C45 steel, hard chrome-plated
Boru	Aluminium alloy, anodised
Başın çapı	Ø 12 to Ø 25 painted brass, Ø 32 to Ø 80 aluminium
Piston	Ø 12 to Ø 63 synthetic (acetal) resin, Ø 80 alu/PTFE
Piston çubuğu contası	NBR (additional charge for PU and FKM)
Piston contası	NBR (additional charge for PU and FKM)

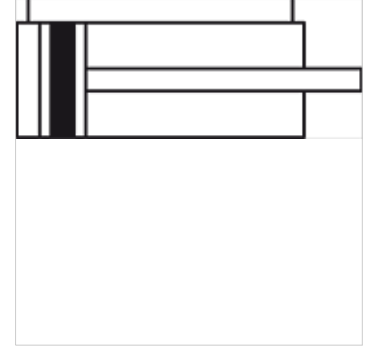

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

Suitable for installation in limited spaces, with magnet.

Ek bilgiler

Important: The scope of supply does not include a connector. Please order separately.

Other types, e.g. increased thermal stability, non-standard strokes, through rod, non-rotating version, etc., available on request.

Ürün

Tanım	Ø piston	Darbe (mm)	Bağlantı	Dişli iç piston çubuğu
K- 07 15 11 31	12 mm	5	M 5	M 3
K- 07 15 11 32	12 mm	10	M 5	M 3
K- 07 15 11 33	12 mm	25	M 5	M 3
K- 07 15 11 34	12 mm	30	M 5	M 3
K- 07 15 11 35	12 mm	40	M 5	M 3
K- 07 15 11 36	16 mm	5	M 5	M 5
K- 07 15 11 37	16 mm	10	M 5	M 5
K- 07 15 11 38	16 mm	25	M 5	M 5
K- 07 15 11 39	16 mm	30	M 5	M 5
K- 07 15 11 40	16 mm	40	M 5	M 5
K- 07 15 11 41	20 mm	5	M 5	M 5
K- 07 15 11 42	20 mm	10	M 5	M 5
K- 07 15 11 43	20 mm	25	M 5	M 5
K- 07 15 11 44	20 mm	30	M 5	M 5
K- 07 15 11 45	20 mm	40	M 5	M 5
K- 07 15 11 46	20 mm	50	M 5	M 5
K- 07 15 11 47	25 mm	5	G 1/8	M 5
K- 07 15 11 48	25 mm	10	G 1/8	M 5
K- 07 15 11 49	25 mm	25	G 1/8	M 5
K- 07 15 11 50	25 mm	30	G 1/8	M 5
K- 07 15 11 51	25 mm	40	G 1/8	M 5
K- 07 15 11 52	25 mm	50	G 1/8	M 5
K- 07 15 11 53	32 mm	5	G 1/8	M 6
K- 07 15 11 54	32 mm	10	G 1/8	M 6
K- 07 15 11 55	32 mm	25	G 1/8	M 6
K- 07 15 11 56	32 mm	30	G 1/8	M 6
K- 07 15 11 57	32 mm	40	G 1/8	M 6
K- 07 15 11 58	32 mm	50	G 1/8	M 6
K- 07 15 11 59	40 mm	5	G 1/8	M 6
K- 07 15 11 60	40 mm	10	G 1/8	M 6
K- 07 15 11 61	40 mm	25	G 1/8	M 6
K- 07 15 11 62	40 mm	30	G 1/8	M 6
K- 07 15 11 63	40 mm	40	G 1/8	M 6



K-KURZH ZYL DOPPELW ACP

Short-stroke cylinders, double acting (magnetic, non-cushioned)

HANSA FLEX

Ürün

Tanım	Ø piston	Darbe (mm)	Bağlantı	Dişli iç piston çubuğu
K- 07 15 11 64	40 mm	50	G 1/8	M 6
K- 07 15 11 65	50 mm	5	G 1/8	M 8
K- 07 15 11 66	50 mm	10	G 1/8	M 8
K- 07 15 11 67	50 mm	25	G 1/8	M 8
K- 07 15 11 68	50 mm	30	G 1/8	M 8
K- 07 15 11 69	50 mm	40	G 1/8	M 8
K- 07 15 11 70	50 mm	50	G 1/8	M 8
K- 07 15 11 71	50 mm	70	G 1/8	M 8
K- 07 15 11 72	63 mm	5	G 1/8	M 8
K- 07 15 11 73	63 mm	10	G 1/8	M 8
K- 07 15 11 74	63 mm	25	G 1/8	M 8
K- 07 15 11 75	63 mm	30	G 1/8	M 8
K- 07 15 11 76	63 mm	40	G 1/8	M 8
K- 07 15 11 77	63 mm	50	G 1/8	M 8
K- 07 15 11 78	63 mm	70	G 1/8	M 8
K- 07 15 11 79	80 mm	5	G 1/4	M 10
K- 07 15 11 80	80 mm	10	G 1/4	M 10
K- 07 15 11 81	80 mm	25	G 1/4	M 10
K- 07 15 11 82	80 mm	30	G 1/4	M 10
K- 07 15 11 83	80 mm	40	G 1/4	M 10
K- 07 15 11 84	80 mm	50	G 1/4	M 10
K- 07 15 11 85	80 mm	70	G 1/4	M 10
K- 07 15 11 86	80 mm	100	G 1/4	M 10

Aksesuar

K-MAGNETSENSOREN-REED Reed magnetic sensor (incl. 2.5 m cable)