# K-L-STECK VB 2
Union elbows

HANSA-FLEX

## Özellikler

| | |
|---|---|
| **Çalışma basıncı** | Max. 16 bar |
| **İşletim ısısı** | -20 °C to +80 °C |
| **Malzeme** | Nikel kaplı pirinç |
| **Bastırma halkası** | Hostaform |
| **Germe halkası** | Stainless steel |



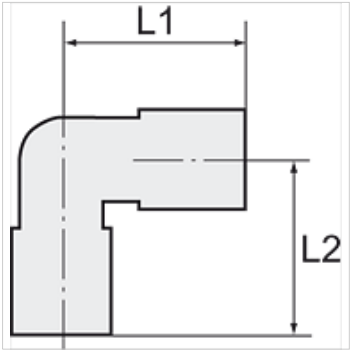


## Açıklama

Diğer bilgiler, istek üzerinedir.

## Açıklama

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Ürün

| Tanım | Hortumun dış çapı için | L1 (mm) | L2 (mm) |
|---|---|---|---|
| **K- 07 40 25 34** | 3 mm | 10,4 | 10,4 |
| **K- 07 40 25 35** | 4 mm | 16,7 | 16,7 |
| **K- 07 40 25 36** | 5 mm | 19,2 | 19,2 |
| **K- 07 40 25 37** | 6 mm | 19,0 | 19,0 |
| **K- 07 40 25 38** | 8 mm | 21,3 | 21,3 |
| **K- 07 40 25 39** | 10 mm | 23,3 | 23,3 |
| **K- 07 40 25 40** | 12 mm | 26,0 | 26,0 |
| **K- 07 40 25 41** | 14 mm | 29,3 | 29,3 |

*Titiz kontrole rağmen hatalar önlenemez ve sorumluluk altında bırakmayan bilgiler hakkında hiçbir sorumluluk kabul edilmez.*