

K-VHRO IS OR MS NI

Hexagon socket screw plugs with O-ring

HANSA FLEX


Özellikler

İşletim ısısı Max. 80 °C (with O-ring, NBR)

Basınç Max. 60 bar

Model Blok Tapa

Malzeme Nikel kaplı pirinç

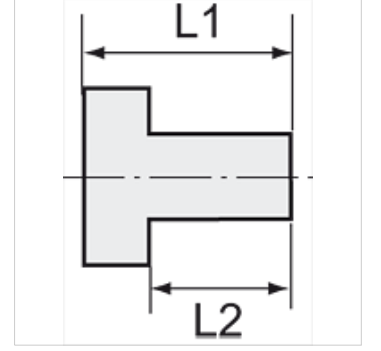

Açıklama

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes. Diğer bilgiler, istek üzerinedir.

Açıklama

Suitable for air, water, oil, steam, etc.

Ek bilgiler

Further types and dimensions on request.

Ürün

Tanım	Mil	İç altı köşeli (mm)	L1 (mm)	L2 (mm)
K- 07 40 39 91	M 5	2,5	6,5	4,0
K- 07 40 39 92	G 1/8	3,0	9,5	7,0
K- 07 40 39 93	G 1/4	6,0	11,0	8,0
K- 07 40 39 94	G 3/8	8,0	12,5	9,0
K- 07 40 39 95	G 1/2	10,0	14,5	11,0
K- 07 40 44 09	G 3/4	17,0	20,0	15,5
K- 07 40 44 10	G 1	19,0	21,0	16,0