



K-VHR IS BUND ES

Hexagon socket screw plugs with collar

HANSA FLEX

Özellikler

Çalışma basıncı	Max. 20 bar
Model	Blok Tapa
Malzeme	Paslanmaz çelik 1.4571

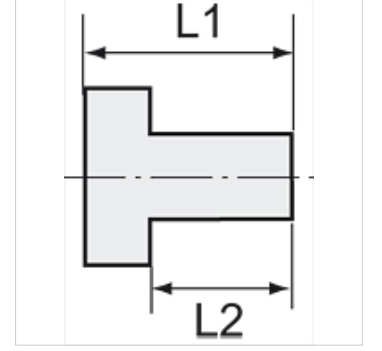

Açıklama

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes. Diğer bilgiler, istek üzerinedir.

Ek bilgiler

Further types and dimensions on request.

Ürün

Tanım	Mil	L1 (mm)	L2 (mm)	SW
K- 07 40 39 65	G 1/8	11,0	8,0	5 mm
K- 07 40 39 66	G 1/4	13,0	10,0	6 mm
K- 07 40 39 67	G 3/8	15,0	12,0	8 mm
K- 07 40 39 68	G 1/2	18,0	14,0	10 mm
K- 07 40 45 22	G 3/4	20,0	16,0	12 mm
K- 07 40 45 25	G 1	21,0	16,0	17 mm