


# K-WTST SAFETY BK SCHA AN HANSA

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and 2-piece service unit

**HANSA FLEX**

## Özellikler

|                               |   |
|-------------------------------|---|
| Giriş basıncı                 | 2.5 - 16 bar  |
| Çıkış basıncı                 | 0.5 - 8 bar   |
| Sıcaklık sahası               | -10 °C to +50 °C  |
| Akışkanlar                    | Basıncılı hava  |
| Yalıtım malzemesi             | NBR   |
| Bağlantı vida dişi            | Material: Die-cast zinc   |
| Kap                           | Polycarbonate (with bayonet lock) and bowl guard                  |
| Filtre ünitesi                | Cellpor (PE) 5 µm   |
| Gövde                         | Material: Grivory® (PA 66)  |
| Membran                       | NBR   |
| Öz hava tüketimi              | Max. 1.5 l/min (depending on secondary pressure)                  |
| Akış değeri ölçümü            | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |
| Anschl. Entlüft. Küresel vana | Silencer  |

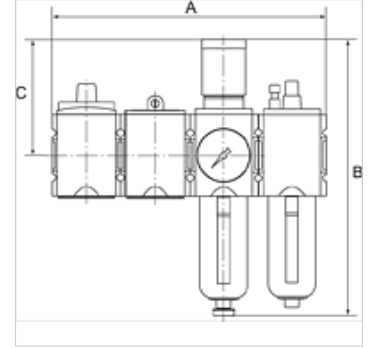

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Açıklama

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

## Siparişle ilgili bilgiler

The price does not include a key lock and padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit

## Ürün

| Tanım          | Mil   | Akış (L/min) | A (mm) | B        | C (mm) | Yoğuşma tahliyesi |
|----------------|-------|--------------|--------|----------|--------|-------------------|
| K- 07 25 15 38 | G 1/4 | 1750         | 208,0  | 225,0 mm | 95,5   | Semi              |
| K- 07 25 15 39 | G 3/8 | 1750         | 208,0  | 225,0 mm | 95,5   | Semi              |
| K- 07 25 15 40 | G 3/8 | 3500         | 252,0  | 257,0 mm | 110,0  | Semi              |
| K- 07 25 15 41 | G 1/2 | 3500         | 252,0  | 257,0 mm | 110,0  | Semi              |
| K- 07 25 15 42 | G 3/4 | 10000        | 340,0  | 329,0 mm | 137,0  | Semi              |
| K- 07 25 15 43 | G 1   | 10000        | 340,0  | 329,0 mm | 137,0  | Semi              |
| K- 07 25 15 44 | G 1/4 | 1750         | 208,0  | 243,0 mm | 95,5   | Auto              |
| K- 07 25 15 45 | G 3/8 | 1750         | 208,0  | 243,0 mm | 95,5   | Auto              |
| K- 07 25 15 46 | G 3/8 | 3500         | 252,0  | 274,0 mm | 110,0  | Auto              |
| K- 07 25 15 47 | G 1/2 | 3500         | 252,0  | 274,0 mm | 110,0  | Auto              |
| K- 07 25 15 48 | G 3/4 | 10000        | 340,0  | 343,0 mm | 137,0  | Auto              |
| K- 07 25 15 49 | G 1   | 10000        | 340,0  | 343,0 mm | 137,0  | Auto              |

## Aksesuar

|                    |          |
|--------------------|----------|
| K-STECKSCHLOSS     | Key lock |
| K-VORHAENGESCHLOSS | Padlock  |