


# K-WTST SAFETY BKR SCHA AN DR MULTI

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and pressure regulator with lock cylinder

**HANSA FLEX**

## Özellikler

|                               |  |
|-------------------------------|--|
| Giriş basıncı                 | 2 - 16 bar   |
| Çıkış basıncı                 | 0.5 - 10 bar   |
| Sıcaklık sahası               | Max. 60 °C   |
| Akışkanlar                    | Basıncılı hava   |
| Yalıtım malzemesi             | NBR  |
| Kap                           | Polycarbonate (with bayonet lock) and bowl guard               |
| Yay kapağı                    | POM  |
| Filtre ünitesi                | Cellpor (PE) 5 µm  |
| Gövde                         | Die-cast zinc  |
| Membran                       | NBR  |
| Drain valve                   | Semi-automatic   |
| Akış değeri ölçümü            | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| Diğer bilgiler                | see data sheets of the individual components (on request)      |
| Anschl. Entlüft. Küresel vana | Silencer   |

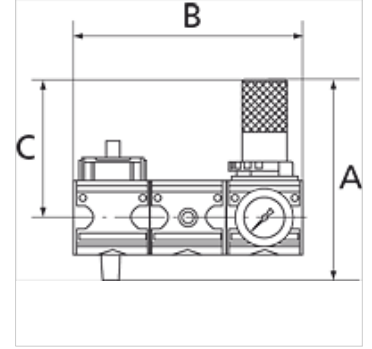

## Açıklama

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

## Siparişe ilgili bilgiler

The price does not include a padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit.

## Ürün

| Tanım          | Mil   | Ayar aralığı | Akış (L/min) | A (mm) | B        | C (mm) |
|----------------|-------|--------------|--------------|--------|----------|--------|
| K- 07 25 15 11 | G 1/4 | 2 - 10 bar   | 1000         | 128,0  | 137,8 mm | 94,0   |
| K- 07 25 15 12 | G 1/2 | 2 - 10 bar   | 4000         | 189,0  | 200,8 mm | 122,0  |
| K- 07 25 15 13 | G 1   | 2 - 10 bar   | 12000        | 241,7  | 282,8 mm | 157,0  |