


K-KURZH ZYL DOPPELW IG ASQ

Short-stroke cylinders, double-acting, with magnet, non-cushioned, with female thread, »ACQ« Series

HANSA FLEX

Özellikler

Akışkanlar	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Çalışma basıncı	1 - 10 bar (double-acting); 2 - 10 bar (single-acting)
Sıcaklık sahası	-20 °C to +80 °C
Piston çubuğu	Hardened steel, thick-chromed
Piston	Brass (12 to 16 mm); Aluminium (20 to 100 mm)
Yalıtım malzemesi	NBR
Silindir borusu	Aluminium

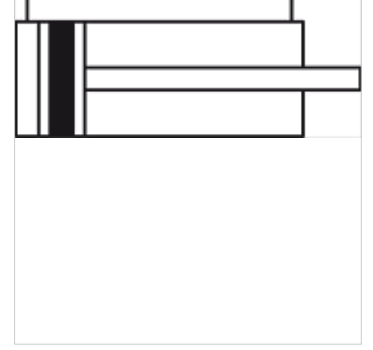

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

Specially for use where space is in short supply. Version with magnetic piston. Short-stroke cylinder in two different versions: Series "ACQ", double-acting, Ø 12 – 100

Ek bilgiler

Important: The scope of supply does not include a connector. Please order separately.
Other piston-Ø and stroke versions available on request.

Ürün

Tanım	Ø piston	Darbe (mm)	Form	Ø piston çubuğu (mm)	Dişli iç piston çubuğu
K- 07 15 12 15	12 mm	5	1	6	M 3 x 0.5
K- 07 15 12 16	12 mm	10	1	6	M 3 x 0.5
K- 07 15 12 17	12 mm	20	1	6	M 3 x 0.5
K- 07 15 12 18	12 mm	25	1	6	M 3 x 0.5
K- 07 15 12 19	12 mm	30	1	6	M 3 x 0.5
K- 07 15 12 20	12 mm	35	1	6	M 3 x 0.5
K- 07 15 12 21	12 mm	40	1	6	M 3 x 0.5
K- 07 15 12 22	12 mm	45	1	6	M 3 x 0.5
K- 07 15 12 23	12 mm	50	1	6	M 3 x 0.5
K- 07 15 12 24	16 mm	5	1	8	M 4 x 0.7
K- 07 15 12 25	16 mm	10	1	8	M 4 x 0.7
K- 07 15 12 26	16 mm	20	1	8	M 4 x 0.7
K- 07 15 12 27	16 mm	25	1	8	M 4 x 0.7
K- 07 15 12 28	16 mm	30	1	8	M 4 x 0.7
K- 07 15 12 29	16 mm	35	1	8	M 4 x 0.7
K- 07 15 12 30	16 mm	40	1	8	M 4 x 0.7
K- 07 15 12 31	16 mm	45	1	8	M 4 x 0.7
K- 07 15 12 32	16 mm	50	1	8	M 4 x 0.7
K- 07 15 12 33	16 mm	55	1	8	M 4 x 0.7
K- 07 15 12 34	16 mm	60	1	8	M 4 x 0.7
K- 07 15 12 35	20 mm	5	2	10	M 5 x 0.8
K- 07 15 12 36	20 mm	10	2	10	M 5 x 0.8
K- 07 15 12 37	20 mm	20	2	10	M 5 x 0.8
K- 07 15 12 38	20 mm	25	2	10	M 5 x 0.8
K- 07 15 12 39	20 mm	30	2	10	M 5 x 0.8
K- 07 15 12 40	20 mm	35	2	10	M 5 x 0.8
K- 07 15 12 41	20 mm	40	2	10	M 5 x 0.8
K- 07 15 12 42	20 mm	45	2	10	M 5 x 0.8
K- 07 15 12 43	20 mm	50	2	10	M 5 x 0.8
K- 07 15 12 44	20 mm	55	2	10	M 5 x 0.8
K- 07 15 12 45	20 mm	60	2	10	M 5 x 0.8
K- 07 15 12 46	20 mm	70	2	10	M 5 x 0.8
K- 07 15 12 47	20 mm	75	2	10	M 5 x 0.8
K- 07 15 12 48	20 mm	80	2	10	M 5 x 0.8
K- 07 15 12 49	25 mm	5	2	12	M 6 x 1



Titiz kontrole rağmen hatalar önlenemez ve sorumluluk altında bırakmayan bilgiler hakkında hiçbir sorumluluk kabul edilmez.

24.04.2025

HANSA-FLEX AG

www.hansa-flex.com

1

K-KURZH ZYL DOPPELW IG ASQ

Short-stroke cylinders, double-acting, with magnet, non-cushioned, with female thread, »ACQ« Series

HANSA FLEX

Ürün

Tanım	Ø piston	Darbe (mm)	Form	Ø piston çubuğu (mm)	Dişli iç piston çubuğu
K- 07 15 12 50	25 mm	10	2	12	M 6 x 1
K- 07 15 12 51	25 mm	20	2	12	M 6 x 1
K- 07 15 12 52	25 mm	25	2	12	M 6 x 1
K- 07 15 12 53	25 mm	30	2	12	M 6 x 1
K- 07 15 12 54	25 mm	35	2	12	M 6 x 1
K- 07 15 12 55	25 mm	40	2	12	M 6 x 1
K- 07 15 12 56	25 mm	45	2	12	M 6 x 1
K- 07 15 12 57	25 mm	50	2	12	M 6 x 1
K- 07 15 12 58	25 mm	55	2	12	M 6 x 1
K- 07 15 12 59	25 mm	60	2	12	M 6 x 1
K- 07 15 12 60	25 mm	70	2	12	M 6 x 1
K- 07 15 12 61	25 mm	75	2	12	M 6 x 1
K- 07 15 12 62	25 mm	80	2	12	M 6 x 1
K- 07 15 12 63	32 mm	5	3	16	M 8 x 1.25
K- 07 15 12 64	32 mm	10	3	16	M 8 x 1.25
K- 07 15 12 65	32 mm	20	3	16	M 8 x 1.25
K- 07 15 12 66	32 mm	25	3	16	M 8 x 1.25
K- 07 15 12 67	32 mm	30	3	16	M 8 x 1.25
K- 07 15 12 68	32 mm	35	3	16	M 8 x 1.25
K- 07 15 12 69	32 mm	40	3	16	M 8 x 1.25
K- 07 15 12 70	32 mm	45	3	16	M 8 x 1.25
K- 07 15 12 71	32 mm	50	3	16	M 8 x 1.25
K- 07 15 12 72	32 mm	55	3	16	M 8 x 1.25
K- 07 15 12 73	32 mm	60	3	16	M 8 x 1.25
K- 07 15 12 74	32 mm	70	3	16	M 8 x 1.25
K- 07 15 12 75	32 mm	75	3	16	M 8 x 1.25
K- 07 15 12 76	32 mm	80	3	16	M 8 x 1.25
K- 07 15 12 77	40 mm	5	3	16	M 8 x 1.25
K- 07 15 12 78	40 mm	10	3	16	M 8 x 1.25
K- 07 15 12 79	40 mm	20	3	16	M 8 x 1.25
K- 07 15 12 80	40 mm	25	3	16	M 8 x 1.25
K- 07 15 12 81	40 mm	30	3	16	M 8 x 1.25
K- 07 15 12 82	40 mm	35	3	16	M 8 x 1.25
K- 07 15 12 83	40 mm	40	3	16	M 8 x 1.25
K- 07 15 12 84	40 mm	45	3	16	M 8 x 1.25
K- 07 15 12 85	40 mm	50	3	16	M 8 x 1.25
K- 07 15 12 86	40 mm	55	3	16	M 8 x 1.25
K- 07 15 12 87	40 mm	60	3	16	M 8 x 1.25
K- 07 15 12 88	40 mm	70	3	16	M 8 x 1.25
K- 07 15 12 89	40 mm	75	3	16	M 8 x 1.25
K- 07 15 12 90	40 mm	80	3	16	M 8 x 1.25
K- 07 15 12 91	50 mm	5	3	20	M 10 x 1.5
K- 07 15 12 92	50 mm	10	3	20	M 10 x 1.5
K- 07 15 12 93	50 mm	20	3	20	M 10 x 1.5
K- 07 15 12 94	50 mm	25	3	20	M 10 x 1.5
K- 07 15 12 95	50 mm	30	3	20	M 10 x 1.5
K- 07 15 12 96	50 mm	35	3	20	M 10 x 1.5
K- 07 15 12 97	50 mm	40	3	20	M 10 x 1.5
K- 07 15 12 98	50 mm	45	3	20	M 10 x 1.5
K- 07 15 12 99	50 mm	50	3	20	M 10 x 1.5
K- 07 15 13 00	50 mm	55	3	20	M 10 x 1.5
K- 07 15 13 01	50 mm	60	3	20	M 10 x 1.5
K- 07 15 13 02	50 mm	70	3	20	M 10 x 1.5
K- 07 15 13 03	50 mm	75	3	20	M 10 x 1.5
K- 07 15 13 04	50 mm	80	3	20	M 10 x 1.5
K- 07 15 13 05	63 mm	5	3	20	M 10 x 1.5
K- 07 15 13 06	63 mm	10	3	20	M 10 x 1.5
K- 07 15 13 07	63 mm	20	3	20	M 10 x 1.5
K- 07 15 13 08	63 mm	25	3	20	M 10 x 1.5
K- 07 15 13 09	63 mm	30	3	20	M 10 x 1.5
K- 07 15 13 10	63 mm	35	3	20	M 10 x 1.5
K- 07 15 13 11	63 mm	40	3	20	M 10 x 1.5



Titiz kontrole rağmen hatalar önlenemez ve sorumluluk altında bırakmayan bilgiler hakkında hiçbir sorumluluk kabul edilmez.

24.04.2025

HANSA-FLEX AG

www.hansa-flex.com

2

K-KURZH ZYL DOPPELW IG ASQ

Short-stroke cylinders, double-acting, with magnet, non-cushioned, with female thread, »ACQ« Series

HANSA FLEX

Ürün

Tanım	Ø piston	Darbe (mm)	Form	Ø piston çubuğu (mm)	Dişli iç piston çubuğu
K- 07 15 13 12	63 mm	45	3	20	M 10 x 1.5
K- 07 15 13 13	63 mm	50	3	20	M 10 x 1.5
K- 07 15 13 14	63 mm	55	3	20	M 10 x 1.5
K- 07 15 13 15	63 mm	60	3	20	M 10 x 1.5
K- 07 15 13 16	63 mm	70	3	20	M 10 x 1.5
K- 07 15 13 17	63 mm	75	3	20	M 10 x 1.5
K- 07 15 13 18	63 mm	80	3	20	M 10 x 1.5
K- 07 15 13 19	80 mm	5	3	25	M 16 x 2
K- 07 15 13 20	80 mm	10	3	25	M 16 x 2
K- 07 15 13 21	80 mm	20	3	25	M 16 x 2
K- 07 15 13 22	80 mm	25	3	25	M 16 x 2
K- 07 15 13 23	80 mm	30	3	25	M 16 x 2
K- 07 15 13 24	80 mm	35	3	25	M 16 x 2
K- 07 15 13 25	80 mm	40	3	25	M 16 x 2
K- 07 15 13 26	80 mm	45	3	25	M 16 x 2
K- 07 15 13 27	80 mm	50	3	25	M 16 x 2
K- 07 15 13 28	80 mm	55	3	25	M 16 x 2
K- 07 15 13 29	80 mm	60	3	25	M 16 x 2
K- 07 15 13 30	80 mm	70	3	25	M 16 x 2
K- 07 15 13 31	80 mm	75	3	25	M 16 x 2
K- 07 15 13 32	80 mm	80	3	25	M 16 x 2
K- 07 15 12 01	100 mm	5	3	32	M 20 x 2.5
K- 07 15 12 02	100 mm	10	3	32	M 20 x 2.5
K- 07 15 12 03	100 mm	20	3	32	M 20 x 2.5
K- 07 15 12 04	100 mm	25	3	32	M 20 x 2.5
K- 07 15 12 05	100 mm	30	3	32	M 20 x 2.5
K- 07 15 12 06	100 mm	35	3	32	M 20 x 2.5
K- 07 15 12 07	100 mm	40	3	32	M 20 x 2.5
K- 07 15 12 08	100 mm	45	3	32	M 20 x 2.5
K- 07 15 12 09	100 mm	50	3	32	M 20 x 2.5
K- 07 15 12 10	100 mm	55	3	32	M 20 x 2.5
K- 07 15 12 11	100 mm	60	3	32	M 20 x 2.5
K- 07 15 12 12	100 mm	70	3	32	M 20 x 2.5
K- 07 15 12 13	100 mm	75	3	32	M 20 x 2.5
K- 07 15 12 14	100 mm	80	3	32	M 20 x 2.5

Aksesuar

K-FUSSBEFESTIGUNG TYP LB 3	Foot model, »LB« type
K-FLANSCHBEFESTIGUNG TYP FA2	Flange model, »FA« type
K-SCHWENKGABELBEFESTIG CB 1	Female hinge model, »CB« type
K-GABELKOEPE TYP Y SET 1	Fork model, »Y« type (incl. threaded adapter)
K-GELENKAUGEN TYP UNIT SET 1	Rod eye model, »UNIT« type (incl. threaded adapter)
K-SENSOREN CS1 KH MIT STECKER	Sensors »CS1« type, cable with M8 plug
K-SENSOREN CS1 KH OHNE STECKER	Sensors »CS1« type, cable without plug