

K-X-STECKVERBINDUNG 1

X-unions

HANSA FLEX

Özellikler



Çalışma basıncı Max. 16 bar

İşletim ısısı -20 °C to +80 °C

Malzeme Nikel kaplı pirinç

Bastırma halkası Hostaform

Germe halkası Stainless steel

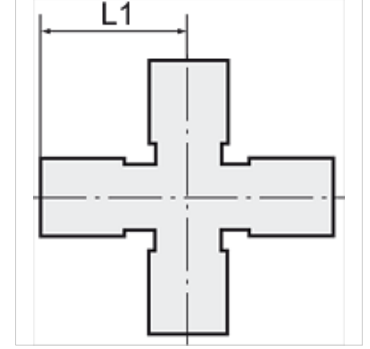

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Ürün

| Tanım | Hortumun dış çapı için | L1 (mm) |
|----------------|------------------------|------------|
| K- 07 40 47 29 | 4 mm | 18,6 |
| K- 07 40 47 30 | 6 mm | 21,9 |
| K- 07 40 47 31 | 8 mm | 25,4 |