



# K-X-STECKVERBINDUNG 1

X-unions

**HANSA FLEX**

## Özellikler

Çalışma basıncı	Max. 16 bar
İşletim ısısı	-20 °C to +80 °C
Malzeme	Nikel kaplı pirinç
Bastırma halkası	Hostaform
Germe halkası	Stainless steel

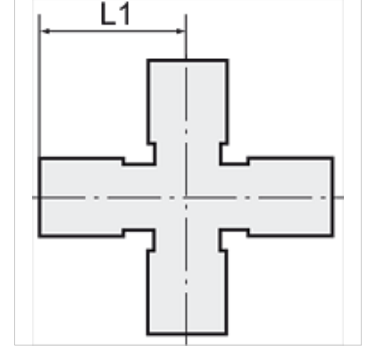

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Açıklama

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Ürün

Tanım	Hortumun dış çapı için	L1 (mm)
K- 07 40 47 29	4 mm	18,6
K- 07 40 47 30	6 mm	21,9
K- 07 40 47 31	8 mm	25,4