


# K-WV 5/2 BEIDS ELEKTRO

5/2-way spool valves, double solenoid

**HANSA FLEX**

## Özellikler

<b>İşlev</b>	5/2-way
<b>Çalışma basıncı</b>	2.5 - 10 bar; Max. vacuum 10 bar (external pilot air)
<b>min. çalışma basıncı</b>	2,5 bar
<b>Sıcaklık sahası</b>	-10 °C to +60 °C
<b>Akış 6bar ve 10bar</b>	1500 NI/min (G 1/4), 4600 NI/min (G 1/2)
<b>Elektrik bağlantısı</b>	Coupler plug PG 9 - form B
<b>Koruma sınıfı</b>	IP 65 (DIN 46244)
<b>Gövde</b>	Anodised aluminium, blue
<b>Piston sürgüsü</b>	Stainless steel
<b>Yalıtım malzemesi</b>	NBR

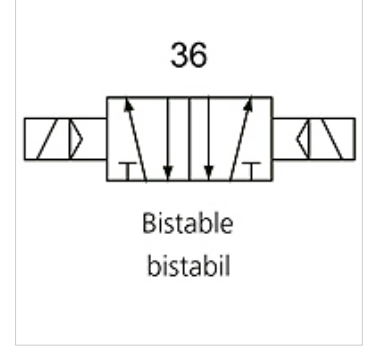

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Açıklama

This valve design, featuring the Tapered Tee Seal®, offers the ability to run without lubrication and supports almost any compressed air quality. The valves are largely resistant to dirt and can thus also be used under extreme conditions without any problems. Leakage is now a thing of the past and the spool no longer sticks, even after long idle periods.

## Ürün

Tanım	Bağlantı	Gerilim	DN	Devre şeması numarası	Kumanda
K- 07 15 02 25	G 1/4	24 V DC	8	36	
K- 07 15 02 26	G 1/2"	24 V DC	15	36	
K- 07 15 02 27	G 1/4	230 V AC, 50 Hz	8	36	
K- 07 15 02 28	G 1/2"	230 V AC, 50 Hz	15	36	