


# K-WTEH SERIE ONE O DRS

Service units, »ONE« Series, without pressure switch

**HANSA FLEX**

## Özellikler

Giriş basıncı	Max. 10 bar
Sıcaklık sahası	-10 °C to +50 °C
Akışkanlar	Basıncılı hava
Koruma sınıfı	IP 65
Çalışma basıncı	0.5 - 8 bar
Basınç şalteri	Changeover contact
Filtre ünitesindeki delik genişliği	20 µm
Akış değeri ölçümü	At 6,3 bar and $\Delta p = 1$ bar

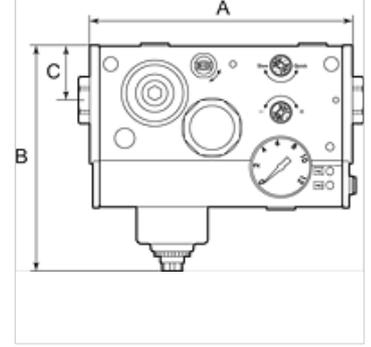

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Açıklama

Multifunctional service unit with 6 or 7 functions in a single device: 3/2-way valve (manually operated), filter with automatic drain valve, air ports, pressure regulator, pressure gauge, soft start valve and optional: pressure switch. This combination of extremely good flow rates and a wide range of functions integrated in a single, compact unit saves valuable space and is unmatched by any similar product available in the market! Soft starting independently of the load and easy replacement of the filter cartridge under pressure are just two of the other outstanding features of this amazing device.

## Siparişe ilgili bilgiler

This unit can also be supplied with many other combinations of functions and port sizes. We will be pleased to make you an offer to match your individual specification on request!

## Ürün

Tanım	Bağlantı	Akış (L/min)	A (mm)	B	C (mm)	Gerilim
K- 07 25 13 79	G 1/4	2400	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 80	G 3/8	3300	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 81	G 1/2"	4000	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)