


# K-WV 3/2 5/2 NAMUR LB LF

3/2- and 5/2-way spool valves with NAMUR style interface and air spring

**HANSA FLEX**

## Özellikler

|                             |  |
|-----------------------------|--|
| Akışkanlar                  | Air, neutral gases (filtered)  |
| Çalışma basıncı             | 1.5 to 10 bar (552.11 and 552.12); 2.5 to 10 bar (552.21 and 552.22) |
| İşletim ısısı               | -20 °C to +50 °C   |
| Bağlantı 1 - 3              | G 1/4 (Port 1), G 1/4 (Port 3 and 5)                                 |
| Bağlantı 1/3 + 5            | G 1/4 (Port 1), G 1/4 (Port 3 and 5)                                 |
| Elektrik bağlantısı         | Plug connector PG 9  |
| Teslimat kapsamına dahildir | Plug connector PG 9, conversion plate, screws and seal               |
| Güç tüketimi                | 3 W=5 VA~  |
| Gövde                       | Anodised aluminium   |
| Sürgüler                    | Stainless steel  |
| Yalıtım malzemesi           | NBR  |

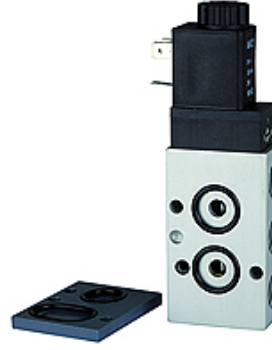

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Açıklama

Pilot-operated 3/2- and 5/2-way spool valves with threaded ports and a NAMUR style interface with air purging function. By adding the conversion plate supplied with each valve, the device can be adapted to 3/2-way function.

Filter regulators are also available with bowl guard or metal bowl. Filter regulators are also available in lockable version. Please ask for more information.

## Ürün

| Tanım          | Gerilim      | Port 1 | Bağlantı 3 + 5 | DN | Akış (L/min) |
|----------------|--------------|--------|----------------|----|--------------|
| K- 07 15 00 13 | 230 V, 50 Hz | G 1/4  | G 1/4          | 7  | 1250         |
| K- 07 15 00 14 | 24 V DC      | G 1/4  | G 1/4          | 7  | 1250         |