

# K-STECKVERBINDU ST RED 1

Reducers with push-in plug

**HANSA FLEX**

## Özellikler


**Çalışma basıncı** Max. 16 bar

**İşletim ısısı** -20 °C to +150 °C

**Malzeme** Nikel kaplı pirinç

**Bastırma halkası** Nickel-plated brass

**Germe halkası** Stainless steel

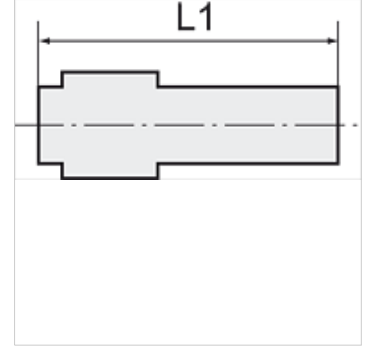

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Açıklama

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring. All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

## Ürün

| Tanım          | Hortumun dış çapı için | L1<br>(mm) | Geçmeli nipel<br>(mm) |
|----------------|------------------------|------------|-----------------------|
| K- 07 40 47 95 | 4 mm                   | 29,5       | 6                     |
| K- 07 40 47 96 | 6 mm                   | 32,5       | 8                     |
| K- 07 40 47 97 | 8 mm                   | 38,5       | 10                    |
| K- 07 40 47 98 | 10 mm                  | 41,0       | 12                    |