

# K-SCHALLDAE SINTERBR S 1

Silencers, sintered bronze, slotted


**HANSA FLEX**

## Özellikler

Çalışma basıncı maks. 10 bar

İşletim ısısı -10 °C to +200 °C

Gürültü seviyesi 6bar 80 ~ 90 dB(A)

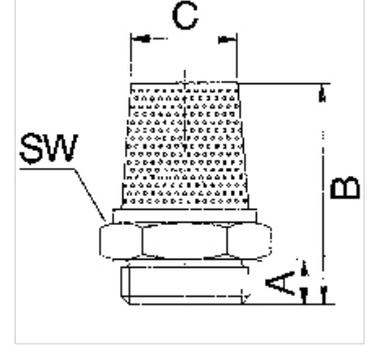

## Açıklama

For reducing the exhaust noise generated by pneumatic equipment.

## Ürün

Tanım	Mil	A (mm)	B (mm)	C (mm)
K- 07 40 35 07	G 1/8	5,5	21,0	8,0
K- 07 40 35 08	G 1/4	8,5	27,0	10,0
K- 07 40 35 09	G 3/8	11,0	36,0	15,0
K- 07 40 35 10	G 1/2	11,0	44,0	19,0