


K-WTEH 3-TLG PC SCHU VARIOBLOC

Service units, 3-piece with polycarbonate bowl and bowl guard

HANSA FLEX

Özellikler

| | |
|-------------------------------------|---|
| Giriş basıncı | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Akışkan sıcaklığı | max. 50 °C |
| Ortam sıcaklığı | Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl) |
| Filtre ünitesindeki delik genişliği | 40 µm |
| Yalıtım malzemesi | NBR |
| Yay kapağı | POM |
| Gövde | Die-cast zinc |
| Membran | NBR |
| Damla örtüsü | PA |
| Drain valve | Manual |
| Akış değeri ölçümü | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

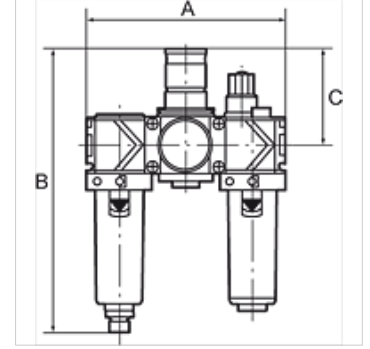

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

Two or three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

Siparişle ilgili bilgiler

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges (0.5 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

Ek bilgiler

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges.

Ürün

| Tanım | Mil | Ayar aralığı | Akış (L/min) | A (mm) | B | C (mm) |
|----------------|-------|--------------|--------------|--------|----------|--------|
| K- 07 25 22 86 | G 1/4 | 0.5 - 10 bar | 1500 | 144,0 | 201,0 mm | 68,0 |
| K- 07 25 22 85 | G 3/8 | 0.5 - 10 bar | 1800 | 144,0 | 201,0 mm | 68,0 |
| K- 07 25 22 84 | G 1/2 | 0.5 - 10 bar | 3400 | 210,0 | 247,0 mm | 98,0 |
| K- 07 25 22 83 | G 3/4 | 0.5 - 10 bar | 5000 | 210,0 | 247,0 mm | 98,0 |
| K- 07 25 22 82 | G 1 | 0.5 - 10 bar | 5000 | 264,0 | 247,0 mm | 98,0 |