


K-FI REGL PC-BEHAELTER S MAN VARIOB

Filter regulators with polycarbonate bowl, bowl guard and pressure gauge

HANSA FLEX

Özellikler

| | |
|-------------------------------------|---|
| Giriş basıncı | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Akışkan sıcaklığı | max. 50 °C |
| Ortam sıcaklığı | Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl) |
| Filtre ünitesindeki delik genişliği | 40 µm |
| Yalıtım malzemesi | NBR |
| Yay kapağı | POM |
| Gövde | Die-cast zinc |
| Membran | NBR |
| Drain valve | Manual |
| Akış değeri ölçümü | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

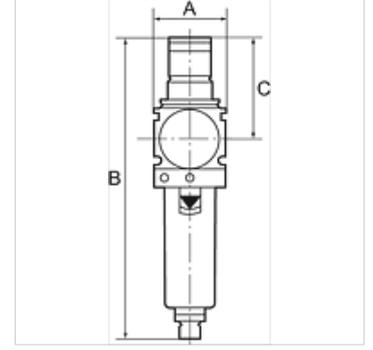

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

Reversible diaphragm pressure regulators, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator. The pressure setting can be locked by pushing the knob down. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

Siparişe ilgili bilgiler

Filter regulators are also available with bowl guard or metal bowl. Filter regulators are also available in lockable version. Please ask for more information.

Ek bilgiler

Filter regulators are also available with bowl guard or metal bowl. Filter regulators are also available in lockable version. Please ask for more information.

Ürün

| Tanım | Mil | Ayar aralığı | Akış (L/min) | A (mm) | B | C (mm) |
|----------------|-------|--------------|--------------|--------|----------|--------|
| K- 07 25 23 01 | G 1/4 | 0.5 - 10 bar | 2000 | 48,0 | 203,0 mm | 68,0 |
| K- 07 25 23 00 | G 3/8 | 0.5 - 10 bar | 3000 | 48,0 | 203,0 mm | 68,0 |
| K- 07 25 22 99 | G 1/2 | 0.5 - 10 bar | 5500 | 70,0 | 273,0 mm | 98,0 |
| K- 07 25 22 98 | G 3/4 | 0.5 - 10 bar | 6500 | 70,0 | 273,0 mm | 98,0 |
| K- 07 25 22 97 | G 1 | 0.5 - 10 bar | 6500 | 124,0 | 273,0 mm | 98,0 |