

# K-STECKVERBINDU RED

Reducers

**HANSA FLEX**

## Özellikler


**Çalışma basıncı** Max. 16 bar

**İşletim ısısı** -20 °C to +150 °C

**Malzeme** Nikel kaplı pirinç

**Bastırma halkası** Nickel-plated brass

**Germe halkası** Stainless steel

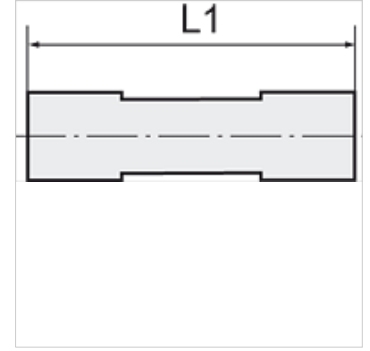

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Açıklama

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring. All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

## Ürün

Tanım	Hortumun dış çapı için	L1 (mm)
K- 07 40 47 75	6 mm / 4 mm	33,0
K- 07 40 47 76	8 mm / 6 mm	39,0
K- 07 40 47 77	10 mm / 8 mm	39,5
K- 07 40 47 78	12 mm / 10 mm	41,5