

K-STECKVERBINDU RED

Reducers

HANSA FLEX

Özellikler


Çalışma basıncı Max. 16 bar

İşletim ısısı -20 °C to +150 °C

Malzeme Nikel kaplı pirinç

Bastırma halkası Nickel-plated brass

Germe halkası Stainless steel

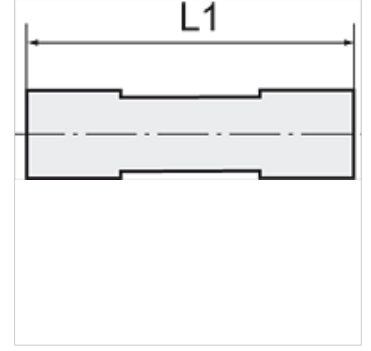

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring. All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Ürün

Tanım	Hortumun dış çapı için	L1 (mm)
K- 07 40 47 75	6 mm / 4 mm	33,0
K- 07 40 47 76	8 mm / 6 mm	39,0
K- 07 40 47 77	10 mm / 8 mm	39,5
K- 07 40 47 78	12 mm / 10 mm	41,5