

# K-STECKVERBINDU RED

Reducers

**HANSA FLEX**

## Özellikler


**Çalışma basıncı** Max. 16 bar

**İşletim ısısı** -20 °C to +150 °C

**Malzeme** Nikel kaplı pirinç

**Bastırma halkası** Nickel-plated brass

**Germe halkası** Stainless steel

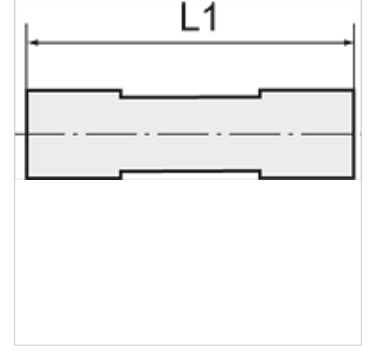

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Açıklama

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring. All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

## Ürün

| Tanım          | Hortumun dış çapı için | L1<br>(mm) |
|----------------|------------------------|------------|
| K- 07 40 47 75 | 6 mm / 4 mm            | 33,0       |
| K- 07 40 47 76 | 8 mm / 6 mm            | 39,0       |
| K- 07 40 47 77 | 10 mm / 8 mm           | 39,5       |
| K- 07 40 47 78 | 12 mm / 10 mm          | 41,5       |