

K-XVM ZYL OR PP

Male connectors, parallel male thread with O-ring

HANSA FLEX


Özellikler

Çalışma basıncı on request

İşletim ısısı Max. +20 °C

Malzeme Polypropylene (PP)

Yalıtım malzemesi NBR

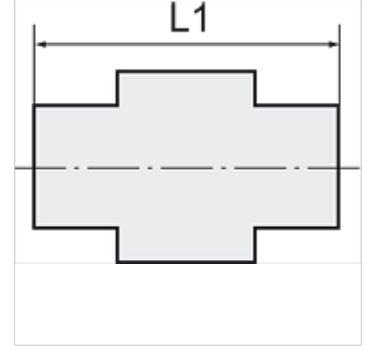

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Ürün

Tanım	Mil	Hortumun dış çapı için	L1 (mm)	SW
K- 07 40 28 39	G 1	32 mm	111,4	46 mm
K- 07 40 28 40	G 1 1/2	32 mm	109,2	49 mm