
K-STECKVERBINDU 1


Straight push-in connector

HANSA-FLEX

Özellikler

Çalışma basıncı	Max. 16 bar
İşletim ısısı	-20 °C to +80 °C
Malzeme	Nikel kaplı pirinç
Bastırma halkası	Hostaform
Germe halkası	Stainless steel



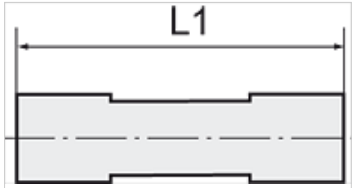

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Ürün

Tanım	Mil	Hortumun dış çapı için	L1 (mm)
K- 07 40 25 18	M 8 x 0.75	3 mm	18,4
K- 07 40 25 19	M 11 x 1	4 mm	30,6
K- 07 40 25 20	M 14 x 1	5 mm	33,5
K- 07 40 25 21	M 13 x 1	6 mm	33,0
K- 07 40 25 22	M 15 x 1	8 mm	35,7
K- 07 40 25 23	M 17 x 1	10 mm	39,2
K- 07 40 25 24	M 20 x 1	12 mm	39,7
K- 07 40 25 25	M 24 x 1	14 mm	45,9

Titiz kontrole rağmen hatalar önlenemez ve sorumluluk altında bırakmayan bilgiler hakkında hiçbir sorumluluk kabul edilmez.