
K-T-STECK VB 3

Union tees

Özellikler

Çalışma basıncı	Max. 16 bar
İşletim ısısı	-20 °C to +80 °C
Malzeme	Nikel kaplı pirinç
Bastırma halkası	Hostaform
Germe halkası	Stainless steel



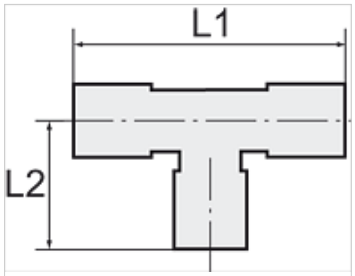

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Ürün

Tanım	Hortumun dış çapı için	L1 (mm)	L2 (mm)
K- 07 40 25 42	3 mm	21,2	10,4
K- 07 40 25 43	4 mm	33,4	16,7
K- 07 40 25 44	5 mm	38,4	19,2
K- 07 40 25 45	6 mm	38,0	19,0
K- 07 40 25 46	8 mm	42,6	21,3
K- 07 40 25 47	10 mm	46,6	23,3
K- 07 40 25 48	12 mm	52,0	26,0
K- 07 40 25 49	14 mm	58,6	29,3

Titiz kontrole rağmen hatalar önlenemez ve sorumluluk altında bırakmayan bilgiler hakkında hiçbir sorumluluk kabul edilmez.