


K-L-RINGSTUECK1

L-ring nipples

HANSA FLEX

Özellikler

| | |
|------------------|--------------------|
| Çalışma basıncı | Max. 16 bar |
| İşletim ısısı | -20 °C to +70°C |
| Malzeme | Nikel kaplı pirinç |
| Bastırma halkası | Hostaform |
| Germe halkası | Stainless steel |

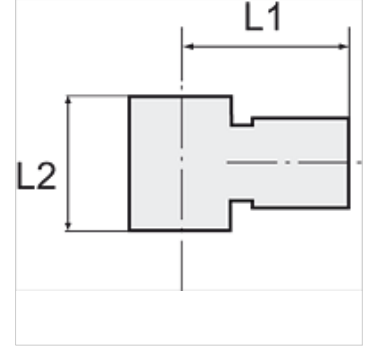

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Ürün

| Tanım | İçi boş vida için | Hortumun dış çapı için | L1 (mm) | L2 (mm) |
|----------------|-------------------|------------------------|------------|------------|
| K- 07 40 26 82 | M 5 | 4 mm | 18,0 | 9,0 |
| K- 07 40 26 87 | G 1/8 | 4 mm | 20,5 | 15,0 |
| K- 07 40 26 88 | G 1/8 | 6 mm | 23,0 | 15,0 |
| K- 07 40 26 89 | G 1/8 | 8 mm | 24,5 | 15,0 |
| K- 07 40 26 85 | G 1/4 | 6 mm | 24,0 | 17,0 |
| K- 07 40 26 86 | G 1/4 | 8 mm | 26,0 | 17,0 |
| K- 07 40 26 83 | G 1/4 | 10 mm | 27,0 | 17,0 |
| K- 07 40 26 84 | G 1/4 | 12 mm | 28,0 | 17,0 |
| K- 07 40 26 92 | G 3/8 | 8 mm | 27,0 | 20,0 |
| K- 07 40 26 90 | G 3/8 | 10 mm | 28,0 | 20,0 |
| K- 07 40 26 91 | G 3/8 | 12 mm | 29,0 | 20,0 |