

K-T-STECK VB 1

Union tees

HANSA FLEX

Özellikler


Çalışma basıncı Max. 16 bar

İşletim ısısı -20 °C to +150 °C

Malzeme Nikel kaplı pirinç

Bastırma halkası Nickel-plated brass

Germe halkası Stainless steel

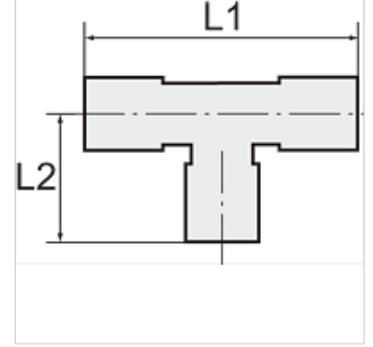

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring. All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Ürün

| Tanım | Hortumun dış çapı için | L1 (mm) | L2 (mm) |
|----------------|------------------------|------------|------------|
| K- 07 40 27 57 | 4 mm | 34,0 | 17,0 |
| K- 07 40 27 58 | 6 mm | 39,0 | 19,5 |
| K- 07 40 27 59 | 8 mm | 46,0 | 23,0 |
| K- 07 40 27 60 | 10 mm | 50,0 | 25,0 |
| K- 07 40 47 81 | 12 mm | 54,0 | 27,0 |
| K- 07 40 47 82 | 14 mm | 62,0 | 31,0 |