

# K-T-STECK VB 1

Union tees

**HANSA FLEX**

## Özellikler



**Çalışma basıncı** Max. 16 bar

**İşletim ısısı** -20 °C to +150 °C

**Malzeme** Nikel kaplı pirinç

**Bastırma halkası** Nickel-plated brass

**Germe halkası** Stainless steel

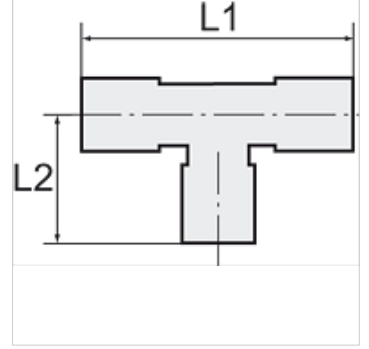

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Açıklama

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring. All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

## Ürün

| Tanım          | Hortumun dış çapı için | L1<br>(mm) | L2<br>(mm) |
|----------------|------------------------|------------|------------|
| K- 07 40 27 57 | 4 mm                   | 34,0       | 17,0       |
| K- 07 40 27 58 | 6 mm                   | 39,0       | 19,5       |
| K- 07 40 27 59 | 8 mm                   | 46,0       | 23,0       |
| K- 07 40 27 60 | 10 mm                  | 50,0       | 25,0       |
| K- 07 40 47 81 | 12 mm                  | 54,0       | 27,0       |
| K- 07 40 47 82 | 14 mm                  | 62,0       | 31,0       |