
K-T-STECK VB 1

Union tees

Özellikler

Çalışma basıncı	Max. 16 bar
İşletim ısısı	-20 °C to +150 °C
Malzeme	Nikel kaplı pirinç
Bastırma halkası	Nickel-plated brass
Germe halkası	Stainless steel



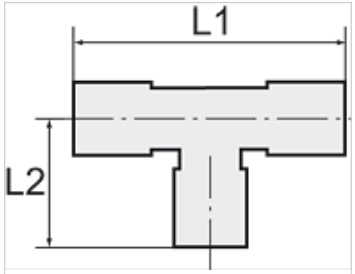

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Ürün

Tanım	Hortumun dış çapı için	L1 (mm)	L2 (mm)
K- 07 40 27 57	4 mm	34,0	17,0
K- 07 40 27 58	6 mm	39,0	19,5
K- 07 40 27 59	8 mm	46,0	23,0
K- 07 40 27 60	10 mm	50,0	25,0
K- 07 40 47 81	12 mm	54,0	27,0
K- 07 40 47 82	14 mm	62,0	31,0

Titiz kontrole rağmen hatalar önlenemez ve sorumluluk altında bırakmayan bilgiler hakkında hiçbir sorumluluk kabul edilmez.