


K-DRV GEW V SCHLITZ

Unidirectional flow control valves, incoming air restriction (»V«), screw connection

HANSA FLEX

Özellikler

Çalışma basıncı	maks. 10 bar
Sıcaklık sahası	0 °C to +70 °C
İç boş vıda, çevirme kolu, ayarlama vıdası	Nickel-plated brass
İç parçalar	Brass with a bare metal surface
Dudak contası conta halkası	NBR
Contalar (kaybedilmez)	Polyamide (glass fibre-reinforced)

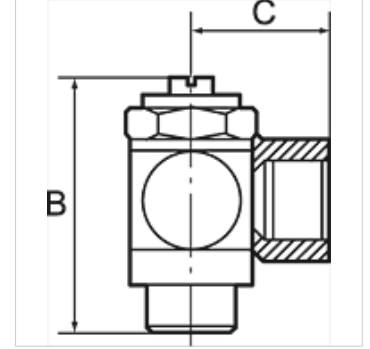

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

For fine regulation of a cylinder piston speed in the forward and return motion and precise control of flow rates. Designed as a banjo-type valve with a hollow bolt and ring piece. Can be screwed directly onto the valve or cylinder to restrict the incoming air. Compact type of construction, also ideal where space is restricted.

Ürün

Tanım	Bağlantı	C (mm)	Mil	SW	B (mm)
K- 07 15 25 21	M 5 female thread	11,5	M 5	8 mm	24,5
K- 07 15 05 70	G 1/8 female thread	16,0	G 1/8	14 mm	32,0
K- 07 15 05 66	G 1/4 female thread	22,0	G 1/4	17 mm	40,0
K- 07 15 25 22	G 3/8 female thread	26,0	G 3/8	20 mm	50,0