K-STECKVERBINDU RED 1


Reducers

HANSA-FLEX

Özellikler

Çalışma basıncı	Max. 16 bar
İşletim ısısı	-20 °C to +80 °C
Malzeme	Nikel kaplı pirinç
Bastırma halkası	Hostaform
Germe halkası	Stainless steel



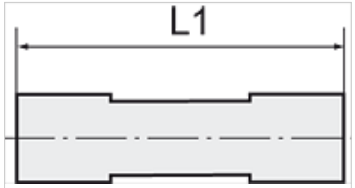

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Ürün

Tanım	Mil	Hortumun dış çapı için	L1 (mm)
K- 07 40 25 26	M 13 x 1	4 mm / 6 mm	32,7
K- 07 40 25 27	M 15 x 1	4 mm / 8 mm	34,4
K- 07 40 25 28	M 15 x 1	6 mm / 8 mm	35,0
K- 07 40 25 29	M 17 x 1	6 mm / 10 mm	37,5
K- 07 40 25 30	M 20 x 1	6 mm / 12 mm	39,0
K- 07 40 25 31	M 17 x 1	8 mm / 10 mm	37,8
K- 07 40 25 32	M 20 x 1	8 mm / 12 mm	40,1
K- 07 40 25 33	M 20 x 1	10 mm / 12 mm	40,8

Titiz kontrole rağmen hatalar önlenemez ve sorumluluk altında bırakmayan bilgiler hakkında hiçbir sorumluluk kabul edilmez.