
K-PNEUMA KOMPAKTSCHLITTEN MXS

Air Slide Table MXS

HANSA-FLEX

Özellikler

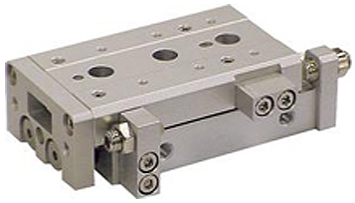

maks. işletme basıncı	0,7 MPa
min. çalışma basıncı	0.15 MPa
Susturma	elastic stop
İşlev	double working
Kontrol basıncı	1,05 MPa
Akışkan sıcaklığı	-10 °C to +60 °C
Ortam sıcaklığı	-10 °C to +60 °C
Piston hızı	50 to 500 mm/s
Akışkanlar	Basınçlı hava
Seri	MXS
Diğer bilgiler	Carriage and air cylinder as a complete unit Ideal for precision assembly applications High resistance to the cultivation of loads

Açıklama

Compact air slide table, series MXS, slide table and air cylinder as complete unit, ideal for precise installation applications, high resistance capacity when building up loads, with stroke limiting unit or shock absorber, (order separately), no stroke adjustment, double action, piston diameter / stroke: 20/100 mm, connection size: G 1/8

Ürün

Tanım	Ø piston (mm)	Darbe (mm)	Bağlantı pnömatik	Ağırlık (kg)
K- 07 55 01 46	6	10	M 3	0,080
K- 07 55 01 47	6	20	M 3	0,100
K- 07 55 01 48	6	30	M 3	0,115
K- 07 55 01 49	6	40	M 3	0,155
K- 07 55 01 50	6	50	M 3	0,180
K- 07 55 01 52	8	10	M 5	0,150
K- 07 55 01 53	8	20	M 5	0,160
K- 07 55 01 54	8	30	M 5	0,190
K- 07 55 01 55	8	40	M 5	0,235
K- 07 55 01 56	8	50	M 5	0,285
K- 07 55 01 57	8	75	M 5	0,410
K- 07 55 01 27	12	10	M 5	0,325
K- 07 55 01 29	12	20	M 5	0,325
K- 07 55 01 30	12	30	M 5	0,325
K- 07 55 01 31	12	40	M 5	0,385
K- 07 55 01 32	12	50	M 5	0,485
K- 07 55 01 33	12	75	M 5	0,660
K- 07 55 01 28	12	100	M 5	0,890
K- 07 55 01 35	16	10	M 5	0,570
K- 07 55 01 38	16	20	M 5	0,570
K- 07 55 01 39	16	30	M 5	0,580
K- 07 55 01 40	16	40	M 5	0,640
K- 07 55 01 41	16	50	M 5	0,760
K- 07 55 01 42	16	75	M 5	1,090
K- 07 55 01 36	16	100	M 5	0,770
K- 07 55 01 37	16	125	M 5	0,900
K- 07 55 00 01	20	10	G 1/8	0,960
K- 07 55 00 05	20	20	G 1/8	0,980
K- 07 55 00 06	20	30	G 1/8	1,010
K- 07 55 00 07	20	40	G 1/8	1,100
K- 07 55 00 08	20	50	G 1/8	1,250
K- 07 55 00 09	20	75	G 1/8	-
K- 07 55 00 02	20	100	G 1/8	2,150
K- 07 55 00 03	20	125	G 1/8	2,670
K- 07 55 00 04	20	150	G 1/8	3,190

Titiz kontrole rağmen hatalar önlenemez ve sorumluluk altında bırakmayan bilgiler hakkında hiçbir sorumluluk kabul edilmez.

K-PNEUMA KOMPAKTSCHLITTEN MXS

Air Slide Table MXS

HANSA-FLEX

Ürün

Tanım	Ø piston (mm)	Darbe (mm)	Bağlantı pnömatik	Ağırlık (kg)
K- 07 55 00 10	25	10	G 1/8	1,660
K- 07 55 00 14	25	20	G 1/8	1,680
K- 07 55 00 15	25	30	G 1/8	1,690
K- 07 55 00 16	25	40	G 1/8	1,840
K- 07 55 00 17	25	50	G 1/8	2,090
K- 07 55 00 18	25	75	G 1/8	2,650
K- 07 55 00 11	25	100	G 1/8	3,270
K- 07 55 00 12	25	125	G 1/8	4,140
K- 07 55 00 13	25	150	G 1/8	4,170

Titiz kontrole rağmen hatalar önlenemez ve sorumluluk altında bırakmayan bilgiler hakkında hiçbir sorumluluk kabul edilmez.