# K-KONSTANT DRUCKREGLER STANDARD 2


Constant-pressure regulators

HANSA FLEX

## Özellikler

| | |
|---|---|
| **Giriş basıncı** | Max. 25 bar (G 1/4 to G 1/2), Max. 40 bar (G 3/4 to G 1 1/2) |
| **Akışkan sıcaklığı** | max. 60 °C |
| **Ortam sıcaklığı** | Max. 90 °C |
| **Yalıtım malzemesi** | NBR |
| **Gövde** | Die-cast zinc for (G 1/4 to G 1/2), for Brass (G 3/4 to G 1 1/2) |
| **Akış değeri ölçümü** | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |
| **Diğer bilgiler** | User manual on request |



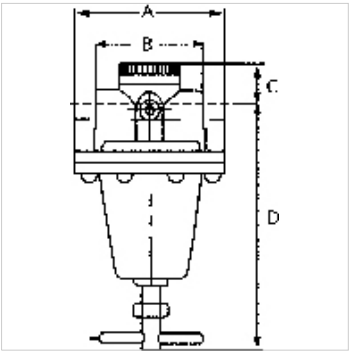


## Açıklama

Reversible diaphragm pressure regulators, independent of inlet pressure, with self-relieving design. The pressure regulators maintain a constant working pressure regardless of variations in the inlet pressure.

## Ürün

| Tanım | Mil | Ayar aralığı | Akış (L/min) | A (mm) | B | C (mm) | TR (mm) | DN |
|---|---|---|---|---|---|---|---|---|
| **K- 07 25 03 98** | G 3/4 | 0.5 - 3 bar | 8700 | 116,0 | 93,0 mm | 43,0 | 177,0 | 20 |
| **K- 07 25 03 99** | G 3/4 | 0.5 - 6 bar | 8200 | 116,0 | 93,0 mm | 43,0 | 177,0 | 20 |
| **K- 07 25 04 00** | G 3/4 | 0.5 - 10 bar | 7830 | 116,0 | 93,0 mm | 43,0 | 177,0 | 20 |
| **K- 07 25 04 01** | G 3/4 | 0.5 - 16 bar | 7400 | 116,0 | 93,0 mm | 43,0 | 172,0 | 20 |
| **K- 07 25 04 02** | G 3/4 | 0.5 - 25 bar | 6500 | 116,0 | 93,0 mm | 43,0 | 172,0 | 20 |
| **K- 07 25 04 03** | G 1 | 0.5 - 3 bar | 8700 | 116,0 | 81,0 mm | 43,0 | 177,0 | 20 |
| **K- 07 25 04 04** | G 1 | 0.5 - 6 bar | 8200 | 116,0 | 81,0 mm | 43,0 | 177,0 | 20 |
| **K- 07 25 04 05** | G 1 | 0.5 - 10 bar | 7830 | 116,0 | 81,0 mm | 43,0 | 177,0 | 20 |
| **K- 07 25 04 06** | G 1 | 0.5 - 16 bar | 7400 | 116,0 | 81,0 mm | 43,0 | 172,0 | 20 |
| **K- 07 25 04 07** | G 1 | 0.5 - 25 bar | 6500 | 116,0 | 81,0 mm | 43,0 | 172,0 | 20 |
| **K- 07 25 04 08** | G 1 1/4 | 0.5 - 3 bar | 16000 | 114,0 | 126,0 mm | 48,0 | 189,0 | 25 |
| **K- 07 25 04 09** | G 1 1/4 | 0.5 - 6 bar | 14000 | 114,0 | 126,0 mm | 48,0 | 189,0 | 25 |
| **K- 07 25 04 10** | G 1 1/4 | 0.5 - 10 bar | 12160 | 114,0 | 126,0 mm | 48,0 | 189,0 | 25 |
| **K- 07 25 04 11** | G 1 1/4 | 0.5 - 16 bar | 11000 | 114,0 | 126,0 mm | 48,0 | 184,0 | 25 |
| **K- 07 25 04 12** | G 1 1/4 | 0.5 - 25 bar | 8500 | 114,0 | 126,0 mm | 48,0 | 184,0 | 25 |
| **K- 07 25 04 13** | G 1 1/2 | 0.5 - 3 bar | 16000 | 114,0 | 114,0 mm | 48,0 | 189,0 | 25 |
| **K- 07 25 04 14** | G 1 1/2 | 0.5 - 6 bar | 14000 | 114,0 | 114,0 mm | 48,0 | 189,0 | 25 |
| **K- 07 25 04 15** | G 1 1/2 | 0.5 - 10 bar | 12160 | 114,0 | 114,0 mm | 48,0 | 189,0 | 25 |
| **K- 07 25 04 16** | G 1 1/2 | 0.5 - 16 bar | 11000 | 114,0 | 114,0 mm | 48,0 | 184,0 | 25 |
| **K- 07 25 04 17** | G 1 1/2 | 0.5 - 25 bar | 8500 | 114,0 | 114,0 mm | 48,0 | 184,0 | 25 |

## Yedek Parçalar

| | |
|---|---|
| **K-HALTERBAUSATZ STANDARD** | Holder |
| **K-VERSCHLEI-SATZ** | Set of wearing parts |
| **K-RD NIPPEL KURZ 1** | Reducing nipples, short type |
| **K-XV AGM 2** | Double nipples, parallel male thread |

*Titiz kontrole rağmen hatalar önlenemez ve sorumluluk altında bırakmayan bilgiler hakkında hiçbir sorumluluk kabul edilmez.*